

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/007005

International filing date: 04 March 2005 (04.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US  
Number: 60/550,930  
Filing date: 05 March 2004 (05.03.2004)

Date of receipt at the International Bureau: 18 April 2005 (18.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1003369



# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

*March 31, 2005*

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: *60/550,930*

FILING DATE: *March 05, 2004*

RELATED PCT APPLICATION NUMBER: *PCT/US05/07005*



Certified by

*Don W. Dudas*

Under Secretary of Commerce  
for Intellectual Property  
and Director of the United States  
Patent and Trademark Office

16085 U.S. PTO  
030504

Please type a plus sign (+) inside this box 

Approved for use through 04/30/2003. OMB 085-10032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# **PROVISIONAL APPLICATION FOR PATENT COVER SHEET** This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

INVENTOR(S)					
Given Name (first and middle (if any))		Family Name or Surname		Residence (City and either State or Foreign Country)	
Russell		Keene		Sanbury, MA	
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
COMBINATION FLOW THROUGH INJECTION AND ISOLATION VALVE FOR HIGH PRESSURE FLUIDS					
CORRESPONDENCE ADDRESS					
Direct all correspondence to: <input type="checkbox"/> Customer Number <span style="border: 1px solid black; display: inline-block; width: 150px; height: 20px;"></span> <div style="float: right; border: 1px solid black; padding: 5px; margin-top: -40px; width: 150px;">           Place Customer Number Bar Code Label here         </div>					
OR Type Customer Number here					
<input checked="" type="checkbox"/> Firm or Individual Name <span style="border: 1px solid black; display: inline-block; width: 200px;">Anthony Janluk, Waters Corporation</span>					
Address <span style="border: 1px solid black; display: inline-block; width: 150px;">Legal Department-LG</span>					
Address <span style="border: 1px solid black; display: inline-block; width: 150px;">34 Maple Street</span>					
City <span style="border: 1px solid black; display: inline-block; width: 80px;">Milford</span>		State <span style="border: 1px solid black; display: inline-block; width: 80px;">Massachusetts</span>		ZIP <span style="border: 1px solid black; display: inline-block; width: 80px;">01757-3696</span>	
Country <span style="border: 1px solid black; display: inline-block; width: 80px;">USA</span>		Telephone <span style="border: 1px solid black; display: inline-block; width: 80px;">508-482-2556</span>		Fax <span style="border: 1px solid black; display: inline-block; width: 80px;">508-482-2320</span>	
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages <span style="border: 1px solid black; display: inline-block; width: 40px; text-align: center;">76</span>		<input type="checkbox"/> CD(s), Number <span style="border: 1px solid black; display: inline-block; width: 80px;"></span>			
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets <span style="border: 1px solid black; display: inline-block; width: 40px; text-align: center;">7</span>		<input type="checkbox"/> Other (specify) <span style="border: 1px solid black; display: inline-block; width: 150px;"></span>			
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees				FILING FEE AMOUNT (\$):	
<input checked="" type="checkbox"/> The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number				<div style="border: 1px solid black; padding: 5px; width: 100px; text-align: center;">19-1013/SSMP</div>	
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.				<div style="border: 1px solid black; padding: 5px; width: 100px; text-align: center;">\$160.00</div>	
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted

SIGNATURE

TYPED or PRINTED NAME **Philip Braginsky**

TELEPHONE (516) 742-4343

Date **3/5/2004**

REGISTRATION NO. **40,527**

(If appropriate)  
Docket Number: **16788/WAA359**

## **USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT**


This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

P19LARGE/REV05

22151 U.S. PTO 60/550930

030504

<b>CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)</b>			Docket No.
Applicant(s): Russell Keene			16788/WAA-359
Serial No. Unassigned	Filing Date Herewith	Examiner Unassigned	Group Art Unit Unassigned
Invention: <b>COMBINATION FLOW THROUGH INJECTION AND ISOLATION VALVE FOR HIGH PRESSURE FLUIDS</b>			
I hereby certify that the following correspondence:			
<div>New Provisional Patent Application</div> <p>(Identify type of correspondence)</p>			
is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on			
<div>March 5, 2004</div> <p>(Date)</p>			
<div>Philip Braginsky</div> <p>(Typed or Printed Name of Person Mailing Correspondence)</p>			
<div></div> <p>(Signature of Person Mailing Correspondence)</p>			
<div>EV219148349US</div> <p>("Express Mail" Mailing Label Number)</p>			
Note: Each paper must have its own certificate of mailing.			

# COMBINATION FLOW THROUGH INJECTION AND ISOLATION VALVE FOR HIGH PRESSURE FLUIDS

## BACKGROUND OF THE INVENTION

### Field of Invention

[0001] The invention relates generally to the field of high pressure fluids and, more specifically, to a combination of multiple isolation valves that permit introduction of flow path without interruption of flow from the fluid source.

### Description of Related Art

[0002] Conventional 6-port face shear valves, also referred to as face seal valves, used in high pressure liquid chromatography (HPLC) provide ports that interface with the sample, the syringe, the pump, the column and the two ends of the sample loop. Such face seal valves must be rotated to switch from one port to another. The rotation of the face seal under high pressure inherently causes damage to the plastic mating surfaces because the fluid port openings must slide against the rotor surface causing fatigue of the rotor material. This results in shortened face seal valve life. In addition, it is necessary to temporarily block flow during the sample injection process and sample dispersion occurs.

[0003] At higher chromatography pressures, e.g., greater than 15,000 psig or 100 MPa, what is needed is a flow-through isolation sample injection valve that can provide high sample injection life with minimal sample distortion and minimal pump pressure pulsing.

## BRIEF SUMMARY OF THE INVENTION

[0004] To address the above and other issues, the present invention describes a combination of multiple flow-through high pressure isolation valves for high pressure

fluids, and which is particularly suitable for use in HPLC applications as a substitute for the conventional face shear valve.

[0005] It is an object of this invention to provide a flow-through sample injection valve with fluid port openings that do not slide against a rotor surface causing fatigue of the rotor material.

[0006] It is another object of this invention to provide a flow-through sample injection valve which avoids flow of the sample through non-cylindrical passages so as to minimize sample dispersion.

[0007] In a particular aspect of the invention, the present invention is directed to a flow through injection valve, the flow through injection valve comprising: a stationary member; a movable member, a surface of the stationary member interfacing with a surface of the movable member; and at least one pin isolation valve. The at least one pin isolation valve has a flow through internal conduit, and is movably disposed so that the internal conduit is capable of fluidically communicating with at least one flow through conduit in the movable member, and is movably disposed so that the internal conduit is capable of fluidically communicating with another flow through conduit in the movable member. The movable member of the flow through injection valve can further comprise first and second conduits for interfacing with internal conduits of first and second pin isolation valves, with the first and second conduits opening to a surface of the movable member; a third conduit enabling fluidic communication between the internal conduits of the first and second pin isolation valves; and a fourth conduit enabling fluidic communication between internal conduits of third and fourth pin isolation valves, the third pin isolation valve providing fluid flow, the fourth pin isolation valve exhausting the fluid flow. The movable member can move by rotation around an axis of rotation or by at least one of linear and curvilinear translation. One of the at least one pin isolation valves can be fluidically coupled to a sample loop of a high pressure liquid

chromatography (HPLC) system. One of the at least one pin isolation valves can be in fluidic communication with a pump supplying high pressure liquid to a high pressure liquid chromatography (HPLC) system. One of the at least one pin isolation valves can be fluidically coupled to a column discharging high pressure liquid from a high pressure liquid chromatography (HPLC) system.

**[0008]** In a specific aspect of the invention, the present invention is directed to a flow through injection valve, the flow through injection valve disposed around an axis of rotation, the injection valve comprising: at least two opposing valve ends disposed around the axis of rotation; the movable member comprising a rotor disposed between said valve ends, an axis of rotation of the rotor being one of parallel and coincident with the axis of rotation of the injection valve, and the rotor is disposed such that orientation of the rotor can change by rotation around the axis of rotation of the rotor. The rotor has an outer surface; at least two opposing surfaces each intersecting the outer surface; a first flow-through conduit having an opening on a first of the at least two opposing surfaces and an opening on a second of the at least two opposing surfaces; a second flow-through conduit having an opening on a first of the at least two opposing surfaces and an opening on a second of the at least two opposing surfaces; a flow through conduit having an opening on the outer surface and an opening on the first of the at least two opposing surfaces; and a flow through conduit having an opening on the outer surface and an opening on the second of the at least two opposing surfaces. The rotor further comprises a first sealing annulus for sealing the openings on the first of the at least two opposing surfaces; and a second sealing annulus for sealing the openings on the second of the at least two opposing surfaces.

**[0009]** The rotor further comprises a first pin isolation valve having an internal conduit, the first pin isolation valve disposed to move parallel to the axis of rotation of the injection valve, with the first pin isolation valve movably disposed so as to be capable of fluidically communicating, through said internal conduit, with the opening

on the first flow-through channel on the first of the at least two opposing surfaces, and movably disposed so as to be capable of fluidically communicating, through the internal conduit, with the flow through conduit having an opening on the outer surface and an opening on the second of the at least two opposing surfaces. The rotor further comprises a second pin isolation valve having an internal conduit, the second pin isolation valve disposed to move parallel to the axis of rotation of the injection valve, and movably disposed so as to be capable of fluidically communicating, through the internal conduit, with the opening on the first flow-through channel on the second of the at least two opposing surfaces, and movably disposed so as to be capable of fluidically communicating, through the internal conduit, with the flow through conduit having an opening on the outer surface and an opening on the second of the at least two opposing surfaces.

[0010] The rotor further comprises a third pin isolation valve having an internal conduit, the third pin isolation valve disposed to move parallel to the centerline of the injection valve, the third pin isolation valve movably disposed so as to be capable of fluidically communicating, through the internal conduit, with the opening on the second flow-through channel on the first of the at least two opposing surfaces, and movably disposed so as to be capable of fluidically communicating, through the internal conduit, with the flow through conduit having an opening on the outer surface and an opening on the second of the at least two opposing surfaces. The rotor further comprises a fourth pin isolation valve having an internal conduit, the fourth pin isolation valve disposed to move parallel to the centerline of the injection valve, the fourth pin isolation valve movably disposed so as to be capable of fluidically communicating, through the internal conduit, with the opening on the second flow-through channel on the second of the at least two opposing surfaces, and movably disposed so as to be capable of fluidically communicating, through the internal conduit, with the flow through conduit having an opening on the outer surface and an opening on the second of the at least two opposing surfaces.



**[0011]** The rotor can further comprise: a rotor clamp having an outer surface and an inner surface, the inner surface surrounding at least a portion of the outer surface of the rotor; a first opening on the outer surface of the rotor clamp penetrating the rotor clamp to coincide with the first opening on the outer surface of the rotor; and a second opening on the outer surface of the rotor clamp penetrating the rotor clamp to coincide with the second opening on the outer surface of the rotor. The rotor clamp can further comprise drive means for driving the rotor to rotate around the axis of rotation of the rotor. The rotor clamp drive means can comprise a gear drive operator or a handle operator.

**[0012]** At least one of the valve ends can comprise: a stator enclosing the at least one pin isolation valve, the stator adjacent to the rotor; a sealing layer enclosed within the stator and enclosing the at least one pin isolation valve for sealing the at least one pin isolation valve; a Belleville spring washer; a Belleville spring; a load washer; and a spherical nut, the Belleville spring washer, the Belleville spring, the load washer and the spherical nut axially arranged to impose an axial force for sealing the sealing layer enclosing the pin isolation valve. Either of the first and second pin isolation valves can be fluidically coupled to a sample loop of a high pressure liquid chromatography (HPLC) system. Either of the third and fourth pin isolation valves can be in fluidic communication with a pump supplying high pressure liquid to a high pressure liquid chromatography (HPLC) system or in fluidic communication with a column discharging high pressure liquid to a high pressure liquid chromatography (HPLC) system.

**[0013]** In another embodiment, the present invention is directed to a multiple valve comprised of: a housing; a rotary flow through isolation valve disposed within the housing, with the isolation valve oriented in an axial direction for isolation of fluid flow, the isolation valve disposed around an axis of rotation, the isolation valve comprising: at least two opposing valve ends disposed around the axis of rotation; a rotor disposed

between the valve ends, an axis of rotation of the rotor being substantially parallel and coincident with the axis of rotation of the isolation valve, with the rotor disposed such that orientation of the rotor can change by rotation around the axis of rotation of the rotor. The rotor has: an outer surface, at least two opposing surfaces each intersecting the outer surface; a flow-through conduit having an opening on a first of the at least two opposing surfaces and an opening on a second of the at least two opposing surfaces; a flow through conduit having an opening on the outer surface and an opening on the first of the at least two opposing surfaces; a flow through conduit having an opening on the outer surface and an opening on the second of the at least two opposing surfaces; at least one blank opening on the first of the at least two opposing surfaces; and at least one blank opening on the second of the at least two opposing surfaces. The rotor further comprises: a first sealing annulus for sealing the openings on the first of the at least two opposing surfaces, and a second sealing annulus for sealing the openings on the second of the at least two opposing surfaces. The rotor further comprises: a first pin isolation valve, the first pin isolation valve disposed to move along the axis of rotation of the isolation valve, the first pin isolation valve movably disposed so as to be capable of fluidically communicating with the at least one blank opening on the first of the at least two opposing surfaces, and movably disposed so as to be capable of fluidically communicating with the flow through conduit having an opening on the outer surface and an opening on a second of the at least two opposing surfaces; and a second pin isolation valve, the second pin isolation valve disposed to move along the centerline of the isolation valve, the second pin isolation valve movably disposed so as to be capable of fluidically communicating with the at least one blank opening on the second of the at least two opposing surfaces, the second pin isolation valve movably disposed so as to be capable of fluidically communicating with the flow through conduit having an opening on the outer surface and an opening on the second of the at least two opposing surfaces. The multiple valve further comprises: a linear flow through injection valve, the injection valve comprising: a stationary member; a movable member, the stationary member and the movable member interfacing at a surface, the movable member disposed to slide

along the surface; a chamber disposed between the stationary member and the movable member, the chamber bounded by the surface; the movable member having a first flow through conduit having a first opening interfacing with the chamber and a second opening on a surface of the movable member not interfacing with the chamber, the movable member having a second flow through conduit having a first opening interfacing with the chamber and a second opening on a surface of the movable member not interfacing with the chamber. The movable member further comprises: a third flow through conduit having a first opening and a second opening each on a surface of the movable member interfacing with the chamber; and a fourth flow through conduit having a first opening and a second opening each on a surface of the movable member interfacing with the chamber.

**[0014]** In yet another embodiment, the present invention is directed to a multiple valve comprised of: a housing; a linear flow through isolation valve disposed within the housing, the isolation valve comprising: a stationary member; a movable member, the stationary member and the movable member interfacing at a surface, the movable member disposed to slide along the surface; a chamber disposed between the stationary member and the movable member, with the chamber bounded by the surface. The movable member has a first flow through conduit having an opening interfacing with the chamber and an opening on a surface of the movable member not interfacing with the chamber, a second flow through conduit having an opening interfacing with the chamber, and an opening on a surface of the movable member not interfacing with the chamber, a first blank opening on the surface bounding the chamber, and a second blank opening on the surface bounding the chamber. The multiple valve further comprises a linear flow through injection valve, the injection valve comprising: a stationary member; a movable member, the stationary member and the movable member interfacing at a surface, the movable member disposed to slide along the surface; and a chamber disposed between the stationary member and the movable member, the chamber bounded by the surface. The movable member has: a first flow through conduit having a first opening interfacing

with the chamber and a second opening on a surface of the movable member not interfacing with the chamber, a second flow through conduit having a first opening interfacing with the chamber and a second opening on a surface of the movable member not interfacing with the chamber, a third flow through conduit having a first opening and a second opening each on a surface of the movable member interfacing with the chamber, and a fourth flow through conduit having a first opening and a second opening each on a surface of the movable member interfacing with the chamber,.

[0015] The linear flow through injection valve of the multiple valve can further comprise: at least one of a (a) first pin isolation valve, (b) second pin isolation valve, (c) third pin isolation valve, and (d) fourth pin isolation valve; the first pin isolation valve having an internal conduit, the first pin isolation valve disposed within an opening within the stationary member interfacing with the chamber so that the internal conduit of the first pin isolation valve is movably disposed to be in fluidic communication with the first opening on a first flow through conduit of the movable member, and movably disposed to be in fluidic communication with the first opening of the third flow through conduit, the second pin isolation valve having an internal conduit, the second pin isolation valve disposed within an opening within the stationary member interfacing with the chamber so that the internal conduit of the second pin isolation valve is movably disposed to be in fluidic communication with the first opening on a second flow through conduit of the movable member, and movably disposed to be in fluidic communication with the second opening of the third flow through conduit, the third pin isolation valve having an internal conduit, the third pin isolation valve disposed within an opening within the stationary member interfacing with the chamber so that the internal conduit of the third pin isolation valve is movably disposed to be in fluidic communication with the first opening of the fourth flow through conduit, and movably disposed to be in fluidic communication with the first opening of the first flow through conduit. The fourth pin isolation valve has an internal conduit, the fourth pin isolation valve disposed within an opening within the stationary member interfacing with the

chamber so that the internal conduit of the fourth pin isolation valve is movably disposed to be in fluidic communication with the second opening of the fourth flow through conduit, and movably disposed to be in fluidic communication with the first opening of the second flow through conduit.

[0016] Those skilled in the art recognize that any combination such as rotary isolation and linear injection, linear isolation and rotary injection, rotary injection and rotary isolation, and linear injection and linear isolation multiple valves can be constructed. Furthermore, any of the rotary injection, rotary isolation, linear injection, and linear isolation valves can be constructed independently.

[0017] The present invention is also directed to a method of operating a flow through injection valve, the valve comprising: a movable member, the movable member having first and second conduits for interfacing with internal conduits of first and second pin isolation valves, the first and second conduits opening to a surface of the movable member; a third conduit enabling fluidic communication between the internal conduits of the first and second pin isolation valves; a fourth conduit enabling fluidic communication between internal conduits of third and fourth pin isolation valves, the third pin isolation valve providing fluid flow, the fourth pin isolation valve exhausting the fluid flow;

(A) wherein the valve is in an initial position of flow isolation such that the third pin isolation valve providing fluid flow is in fluidic communication with the fourth pin isolation valve exhausting the fluid flow, the first pin isolation valve is in fluidic communication with the first conduit, and the second pin isolation valve is in fluidic communication with the second conduit; the method comprises the steps of: (I) wherein the first pin isolation valve interfaces with the first conduit, (1) moving the first pin isolation valve away from the first conduit; (2) moving the movable member, (3) moving the first pin isolation valve towards the movable member such that the internal conduit within the first pin isolation valve interfaces with the third conduit; and (II) wherein the second pin isolation valve interfaces with the second conduit, (1) moving the second pin

isolation valve away from the second conduit; (2) moving the movable member, (3) moving the second pin isolation valve towards the movable member such that the internal conduit within the second pin isolation valve interfaces with the third conduit, thereby establishing fluidic communication between the first and second pin isolation valves; and (III) wherein the third pin isolation valve interfaces with the fourth conduit, (1) moving the third pin isolation valve away from the fourth conduit; (2) moving the movable member; (3) moving the third pin isolation valve towards the first conduit to establish fluidic communication with the internal conduit of the third pin isolation valve; and (IV) wherein the fourth pin isolation valve interfaces with the fourth conduit, (1) moving the fourth pin isolation valve away from the fourth conduit; (2) moving the movable member; (3) moving the fourth pin isolation valve towards the second conduit to establish fluidic communication with the internal conduit of the fourth pin isolation valve; and (B) wherein the valve is in an initial position of flow throughput such that at least one of (a) the third pin isolation valve providing fluid flow interfaces with the first conduit and (b) the fourth pin isolation valve exhausting the fluid flow interfaces with the second conduit, the method comprises the steps of: (III) wherein the third pin isolation valve interfaces with the first conduit, (1) moving the third pin isolation valve away from the first conduit, (2) moving the movable member, and (3) moving the third pin isolation valve towards the movable member such that the internal conduit within the third pin isolation valve interfaces with the fourth conduit; and (IV) wherein the fourth pin isolation valve interfaces with the second conduit, (1) moving the fourth pin isolation valve away from the second conduit, (2) moving the movable member, and (3) moving the fourth pin isolation valve towards the movable member such that the internal conduit within the second pin isolation valve interfaces with the first conduit; and (V) wherein the first pin isolation valve interfaces with the third conduit, (1) moving the first pin isolation valve away from said third conduit, (2) moving the movable member, and (3) moving the first pin isolation valve towards the movable member such that the internal conduit within the first pin isolation valve interfaces with the first conduit; and (VI) wherein the second pin isolation valve interfaces with the third conduit, (1) moving the second pin

isolation valve away from the third conduit, (2) moving the movable member, and (3) moving the second pin isolation valve towards the movable member such that the internal conduit within the second pin isolation valve interfaces with the second conduit.

[0018] In another embodiment of the present invention, the present invention is directed also to a method of operating a multiple valve, the multiple valve comprising a flow through isolation valve, the flow through isolation valve comprising: a movable member, the movable member having first and second conduits for interfacing with internal conduits of first and second pin isolation valves, the conduits opening to a surface of the movable member; first and second blank openings for interfacing with the internal conduits of the first and second pin isolation valves, (A) wherein the valve is in an initial position of flow isolation such that at least one of (a) the first pin isolation valve providing fluid flow interfaces with the first blank opening and (b) the second pin isolation valve exhausting the fluid flow interfaces with the second blank opening, the method comprises the steps of: (I) wherein the first pin isolation valve interfaces with the first blank opening, (1) moving the first pin isolation valve away from the first blank opening, (2) moving the movable member, and (3) moving the first pin isolation valve towards the movable member such that the internal conduit within the first pin isolation valve interfaces with the first conduit opening to a surface of the movable member; and (II) wherein the second pin isolation valve interfaces with the second blank opening, (1) moving the second pin isolation valve away from the second blank opening, (2) moving the movable member, and (3) moving the second pin isolation valve towards the movable member such that the internal conduit within the second pin isolation valve interfaces with the second conduit opening to a surface of the movable member, and (B) wherein the valve is in an initial position of flow throughput such that at least one of (a) the first pin isolation valve providing fluid flow interfaces with the first conduit and (b) the second pin isolation valve exhausting the fluid flow interfaces with the second conduit, the method comprises the steps of: (III) wherein the first pin isolation valve interfaces with the first conduit, (1) moving the first pin isolation valve away from the

first conduit, (2) moving said movable member, and (3) moving the first pin isolation valve towards the movable member such that the internal conduit within the first pin isolation valve interfaces with the first blank opening; and (IV) wherein the second pin isolation valve interfaces with the second conduit, (1) moving the second pin isolation valve away from the second conduit, (2) moving the movable member, and (3) moving the second pin isolation valve towards the movable member such that the internal conduit within the second pin isolation valve interfaces with the second blank opening.

**[0019]** In the method of operating a flow through injection valve, the first and second conduits opening to a surface of the movable member can be in fluidic communication with a sample loop of a high pressure liquid chromatography (HPLC) system, or the first and second pin isolation valves can be in fluidic communication with a needle and a syringe of a high pressure liquid chromatography (HPLC) system, or the third and fourth pin isolation valves can be in fluidic communication with a pump and a column of a high pressure liquid chromatography (HPLC) system,

**[0020]** In the method of operating a multiple valve, the multiple valve also comprises a flow through injection valve, the flow through injection valve comprising: a movable member, the movable member having first and second conduits for interfacing with internal conduits of first and second pin isolation valves, the first and second conduits opening to a surface of the movable member; a third conduit enabling fluidic communication between the internal conduits of the first and second pin isolation valves; a fourth conduit enabling fluidic communication between internal conduits of third and fourth pin isolation valves, the third pin isolation valve providing fluid flow, the fourth pin isolation valve exhausting the fluid flow; (A) wherein the valve is in an initial position of flow isolation such that the third pin isolation valve providing fluid flow is in fluidic communication with the fourth pin isolation valve exhausting the fluid flow, the first pin isolation valve is in fluidic communication with the first conduit, and the second pin isolation valve is in fluidic communication with the second conduit; the method



comprises the steps of: (I) wherein the first pin isolation valve interfaces with the first conduit, (1) moving the first pin isolation valve away from the first conduit; (2) moving the movable member, (3) moving the first pin isolation valve towards the movable member such that the internal conduit within the first pin isolation valve interfaces with the third conduit; and (II) wherein the second pin isolation valve interfaces with the second conduit, (1) moving the second pin isolation valve away from the second conduit; (2) moving the movable member, (3) moving the second pin isolation valve towards the movable member such that the internal conduit with the second pin isolation valve interfaces with the third conduit, thereby establishing fluidic communication between the first and second pin isolation valves; and (III) wherein the third pin isolation valve interfaces with said fourth conduit, (1) moving the third pin isolation valve away from the fourth conduit; (2) moving the movable member; (3) moving the third pin isolation valve towards the first conduit to establish fluidic communication with the internal conduit of the third pin isolation valve; and (IV) wherein said fourth pin isolation valve interfaces with the fourth conduit, (1) moving the fourth pin isolation valve away from the fourth conduit; (2) moving the movable member; (3) moving the fourth pin isolation valve towards the second conduit to establish fluidic communication with the internal conduit of the fourth pin isolation valve.

**[0021]** The method of operating a multiple valve also comprises the steps of: (B) wherein the valve is in an initial position of flow throughput such that at least one of (a) the third pin isolation valve providing fluid flow interfaces with the first conduit and (b) the fourth pin isolation valve exhausting the fluid flow interfaces with the second conduit, the method comprises the steps of: (III) wherein the third pin isolation valve interfaces with the first conduit, (1) moving the third pin isolation valve away from the first conduit, (2) moving the movable member, and (3) moving the third pin isolation valve towards the movable member such that the internal conduit within the third pin isolation valve interfaces with the fourth conduit; and (IV) wherein the fourth pin

isolation valve interfaces with the second conduit, (1) moving the fourth pin isolation valve away from the second conduit, (2) moving the movable member, and (3) moving the fourth pin isolation valve towards the movable member such that the internal conduit within the second pin isolation valve interfaces with the first conduit; and (V) wherein the first pin isolation valve interfaces with the third conduit, (1) moving the first pin isolation valve away from the third conduit, (2) moving the movable member, and (3) moving the first pin isolation valve towards the movable member such that the internal conduit within the first pin isolation valve interfaces with the first conduit; and (VI) wherein the second pin isolation valve interfaces with the third conduit, (1) moving the second pin isolation valve away from the third conduit, (2) moving the movable member, and (3) moving the second pin isolation valve towards the movable member such that the internal conduit within the second pin isolation valve interfaces with the second conduit.

[0022] In the method of operating a multiple valve, the first and second conduits opening to a surface of the movable member of the flow through injection valve can be in fluidic communication with a sample loop of a high pressure liquid chromatography (HPLC) system, or the first and second pin isolation valves of the flow through injection valve are in fluidic communication with a needle and a syringe of a high pressure liquid chromatography (HPLC) system, or the third and fourth pin isolation valves of the flow through injection valve can be in fluidic communication with a pump and a column of a high pressure liquid chromatography (HPLC) system,

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0023] These and other features, benefits and advantages of the present invention will become apparent by reference to the following text and figures, with like reference numbers referring to like structures across the views, wherein:

[0024] FIG. 1A illustrates a combination of multiple rotary flow-through isolation valves of the present invention in a side elevation cross-sectional view in the load position interfacing with a sample loop.

[0025] FIG. 1B illustrates the combination of multiple flow-through rotary isolation valves of the present invention of FIG. 1A in a transition position interfacing with a sample loop.

[0026] FIG. 1C illustrates the combination of multiple flow-through rotary isolation valves of the present invention of FIG. 1A in an injection position interfacing with a sample loop.

[0027] FIG. 2A is a perspective view of the isolation portion of the combination of the multiple flow-through rotary isolation valves of FIGS. 1A-1C.

[0028] FIG. 2B is a perspective exploded view of the rotor of the isolation portion of the multiple flow-through rotary isolation valve of FIGS. 1A-1C.

[0029] FIG. 3A is a plan view of the housing of the multiple rotary flow-through isolation valves of FIGS. 1A-1C.

[0030] FIG. 3B is an elevation view of the housing of the multiple flow-through rotary isolation valves of FIGS. 1A-1C.

[0031] FIG. 3C is a detail view of a portion of the rotary isolation valve assembly of FIG. 3A.

[0032] FIG. 4A is a separated elevation section view at break lines 4B of another embodiment of the present invention as a multiple valve comprised of a linear isolation valve and a linear injection valve.

[0033] FIG. 4B is a separated elevation view at break lines 4A of the embodiment of FIG. 4B.

## DETAILED DESCRIPTION OF THE INVENTION

[0034] This application incorporates by reference concurrently filed co-pending provisional application Serial No. (Attorney Docket No. WAA-358)

[0035] The present invention describes a combination isolation valve of multiple flow-through high pressure isolation valves for high pressure fluids. The

combination isolation valve can replace the conventional face shear valve used in HPLC systems. The rotors are designed for use in high pressure fluid systems to permit switching to another flow path without temporarily blocking flow as would occur in face-shear valves as are customarily used in high pressure fluid systems, in particular in high pressure liquid chromatography . The sample fluid injection circuit may be isolated from the remainder of the HPLC system. Each of the combination multiple flow-through isolation valves include a housing having a bore there through and a cylindrical rotor rotatable within the bore.

[0036] When the isolate rotor is in its fluid flow position during the injection phase, fluid flows from a pump, through the isolation valve, to the sample injector circuit, back through another portion of the valve, and then to a column. By turning the rotor 90°, the fluid stop ports prevent the flow of fluid and isolate the sample circuit from the remainder of the HPLC system.

[0037] In particular, in FIG. 1A, an inject rotor 11 of an injection valve 300 of combination or multiple isolation valve 10 is shown in a load phase in fluidic communication with a needle 12 through a pin valve 1 at a port 14 on a side of rotor 11. The combination or multiple isolation valve 10 is comprised of an isolation valve 200 and the injection valve 300. Sample fluid flows from the needle 12 into internal conduit 16. The sample fluid flows through typically a substantially 90° bend 15 to a port 18 on the outer surface of the rotor 11. The port 18 is preferably fluidically coupled to an inlet flexible tube 20 and correspondingly to the sample loop 22 so that the sample fluid flows into the sample loop 22 and flows out through an outlet flexible tube 24.

[0038] The outlet flexible tube 24 is preferably fluidically coupled to a port 26 that is on the outer surface of rotor 11 through a pin valve 2 and in turn to an internal conduit 28. The sample fluid flows through typically a substantially 90° bend 29 to a port 30 on an opposite side of the rotor 11. A syringe 32 can be fluidically coupled to

the port 30 so as to provide negative pressure in the flexible tube 24, sample loop 22, flexible tube 20 and needle 12 for drawing up the sample fluid and to permit the sample fluid to be aspirated from the internal conduit 28.

[0039] The inject rotor 11 includes ports 40 and 42 which interface through internal channel 44; and ports 46 and 48 which interface through internal channel 50. An annular space 52 is formed on one side of the rotor 11 providing fluidic communication between ports 14, 40 and 46. An annular space 54 is formed on the opposite side of the rotor 11 providing fluidic communication between ports 30, 42 and 48.

[0040] During the load phase, the inject rotor 11 is isolated from the high pressure pump 101 and column 102 by means of an isolation rotor 61. The two rotors 11 and 61 interface through high pressure tubing 36 and 38. In particular, high pressure tubing 36 is fluidically coupled with internal channel 50 through pin valve 3 at port 46 while high pressure tubing 38 is fluidically coupled to internal channel 50 through pin valve 4. The high pressure tubing 36 is fluidically coupled to isolate rotor 61 through pin valve 5 which interfaces with the rotor 61 at blank port 82. Correspondingly, the high pressure tubing 38 is fluidically coupled to isolation rotor 61 through pin valve 6 which interfaces with the rotor 61 at blank port 84. Therefore, during the load phase, the pressure within the high pressure tubing 36 and 38 is substantially atmospheric, i.e., 0 psig or 0.101 MPa absolute.

[0041] The isolation rotor 61 includes ports 62 and 64 which interface through internal channel 66. High pressure pump 101 is fluidically coupled to port 70 by means of internal channel 74. The pump 101 interfaces with the outer surface of rotor 61 at a port 78. Similarly, column 102 is fluidically coupled to port 72 by means of internal channel 76. The column 102 interfaces with the outer surface of rotor 61 at a port 80.

[0042] The inject rotor 11 can include a wash pump interfacing at port 40 and a wash discharge interfacing at port 42. Since stagnant flow can occur in the internal rotor passageway 44, rotor wash supply connection 110 is provided to connect from a separate wash pump (not shown) while wash discharge connection 112 enables discharge of the used wash solution.

[0043] The wash pump washes the internal chamber 44 following sample injection. An annular space 88 is formed on one side of the rotor 61 providing fluidic communication between ports 62 and 70. An annular space 90 is formed on the opposite side of the rotor 61 providing fluidic communication between ports 64 and 72.

[0044] FIG. 1B illustrates the transition phase between loading of the sample into the sample loop 22 and the injection phase where the sample within the loop 22 is injected by high pressure pump 101. During the transition phase, the isolation rotor 61 remains in the same position as during the load phase. Only orientation of the inject rotor 11 is changed. Specifically, the rotor 11 is rotated so that the pin valves 1 and 2 are disconnected from the sample loop 22, thereby isolating the needle 12 and the syringe 32 from the sample loop 22. The pin valve 1 is inserted into port 40 while the pin valve 2 is inserted into port 42 so that the needle and syringe are fluidically coupled to each other through internal conduit 44.

[0045] FIG. 1C illustrates the injection phase when high pressure liquid is supplied from the pump 101 to sample loop 22 and on to the column 102. Specifically, in the injection phase, the rotor 11 remains in the position achieved during the transition phase. The rotor 61 is rotated so that the pin valves 5 and 6 are disconnected from the blank ports 82 and 84, respectively. The pin valve 5 is now connected to port 70 so as to cause fluidic communication between the pump 101 and the high pressure tubing 36. Correspondingly, the pin valve 6 is now connected to port 72 so as to cause fluidic communication between the high pressure tubing 38 and the column 102.

[0046] The annular spaces 88 and 90 formed on opposite sides of the rotor 61 provide a high pressure seal annulus for the rotor 61.

[0047] Those skilled in the art recognize that following the inject phase illustrated in FIG. 1C, the flow through isolation valve 200 and the flow through injection valve 300 can be returned to the load phase by reversing the operation back to the transition phase illustrated in FIG. 1B and subsequently to the load phase illustrated in FIG. 1A.

[0048] FIG. 2A illustrates a perspective view of the isolation rotor 61 as it is disposed within a valve body to form a valve assembly 200. The components of valve assembly 200 typically are centered around an axis of rotation such as centerline 200CL. Specifically, the rotor 61 is positioned so that stators 202 and 204 are disposed on either end of the rotor 61. Belleville springs 220 and 222 deflect the axial loads along the centerline 200CL which act on the rotor 61. The Belleville springs 220 and 222 and Belleville washers 232 and 234 are mounted on an end of both stators 202 and 204 by means of flanges 224 and 226. The load washers 224 and 226 are locked into position by spherical nuts 228 and 230. Both sets of sealing layers 206 and 208 are compressed by the axial forces imposed by Belleville spring washers 232 and 234, respectively. The rotor 61 is comprised preferably of PEEK (polyetheretherketone) or PEEK blend. The rotor clamp 240 and the stators 202 and 204 are comprised preferably of Type 316 stainless steel

[0049] The foregoing materials are not exclusive and other materials can be applied by those skilled in the art.

[0050] The rotor 61 is shown in a cutaway view disposed between stators 202 and 204. The rotor 61 is sealed by a set of three sealing layers 206 and 208 set around

the pin valves 5 and 6, respectively. The preferred materials for the sealing layers 206 and 208 comprise PEEK, PTFE (polytetrafluorethylene), PEEK in that order.

[0051] The foregoing materials are not exclusive and other materials can be applied by those skilled in the art.

[0052] The respective ends 242 and 244 of the flow through isolation valve 200 can be considered to comprise the stators 202 and 204, the sealing layers 206 and 208, Belleville spring washers 232 and 234, Belleville springs 220 and 222, load washers 224 and 226 and spherical nuts 228 and 230.

[0053] FIG. 2B is an exploded view of a portion of the components comprising a first variation of the embodiment of the flow through isolation valve 200. Pump supply pin 101 interfaces with port 78 in the rotor clamp 94 and outlet supply to column pin 102 interfaces with port 80 in the rotor clamp 94. Face seal valve supply pin 6 is surrounded by stator 204 and interfaces with one end of rotor 61 while face seal valve discharge pin 5 is surrounded by stator 202 and interfaces with the opposite end of rotor 61. During normal operation, only the pins 5 and 6 which are surrounded by the stators 202 and 22 are moved either away from or back towards the rotor 61. The pump supply pin 101 and outlet supply to column pin 102 are maintained normally in position except that they are rotated together with the rotation of the rotor 61. The rotor 61 and rotor clamp 94 are rotated around the centerline 200CL by means of drive gear 205.

[0054] When the rotor 61 is in its fluid flow position, fluid flows from a separate high pressure pump, through the isolation valve 200, to the sample injector circuit of injection valve 10, back to the isolation valve 200, and then to a column.

[0055] When the rotor 61 is rotated around axis of rotation centerline 200CL by means of drive gear 205 through an angle of preferably 90°, the pins 5 and 6 are



repositioned to the blank fluid flow stop ports **82** and **84** which prevent the flow of fluid and isolate the sample circuit of injection valve **10** from the remainder of the HPLC system. Those skilled in the art recognize that the drive gear **205** can be either a separate unit from the rotor clamp **94** or else the drive gear **205** can be an integral unitary structure combined with the rotor claim **94** and even the rotor **61**. In addition, although shown as a drive gear, other means known to those skilled in the art such as, for example, an operating handle can be employed.

**[0056]** Although the ports **78** and **80** are preferably offset by an angle of about 90° from each other on the outer surface of the rotor, the ports can be aligned to be adjacent to each other. The offset is preferred due to the advantage of threaded connections for sealing and the resultant need for larger diameter tap holes. The threaded tap holes are generally 7.9 mm (5/16 in.) in diameter.

**[0057]** FIG. 3A is a plan view of the housing **310** of the multiple flow-through isolation valves of FIGS. 1A-1C. FIG. 3B is an elevation view of the housing of the multiple flow-through isolation valves of FIGS. 1A-1C.

**[0058]** The isolation valve assembly **200** is disposed within the housing **310**. The injection rotor **11** is disposed within injection valve assembly **300** around an axis of rotation such as centerline **300CL**. The isolation valve assembly **200** and the injection valve assembly **300** are disposed within the housing **310** through the end plates **312** and **314** preferably such that the axis of rotation centerlines **200CL** and **300CL** are parallel to each other. The valve assemblies **200** and **300** are operated by means such as a cam mechanism **320** known to those skilled in the art.

**[0059]** FIG. 3C is a detail view of a portion of the isolation valve assembly of FIG. 3A. As before, the rotor **61** is positioned so that stators **202** and **204** are disposed on either end of the rotor **61**. Belleville springs **220** and **222** deflect the axial loads along the

centerline **200CL** which act on the rotor **61**. The Belleville spring **220** is mounted on an end of stator **202** by means of load washer **224**. The load washer **224** is locked into position by spherical nut **228**. Sealing layer set **206** is compressed by the axial force imposed by Belleville spring washer **232**. The spherical nuts **228** and **230** (not shown) are supported by, and penetrate through, housing end plates **312** and **314**, respectively.

**[0060]** As described previously with respect to FIG. 2A, the rotor **61** is shown in a cutaway view in FIG. 3C disposed between stators **202** and **204**. The rotor **61** is sealed by a set of three sealing layers **206** and **208** set around the pin valves **5** and **6**, respectively. As previously noted, the preferred materials and arrangement for the sealing layers comprise PEEK, PTFE, PEEK in that order. A valve end **240** of the flow through isolation valve assembly **200** can be considered to comprise the stator **202**, the sealing layer **206**, Belleville spring washer **232**, Belleville spring **220**, load washer **224**, and spherical nut **228**. Those skilled in the art recognize that the opposite valve end of the isolation valve assembly **200** is typically symmetrical and therefore is comprised typically of the corresponding symmetrical components.

**[0061]** In addition, those skilled in the art recognize that the isolation valve **200** and injection valve **300** of combination isolation valve **10** can also be configured by either of the alternate embodiments in any combination of embodiments described in co-pending US Provisional Patent Application No. (Docket No. WAA-358), previously disclosed as being incorporated by reference. That is, either the first and second embodiments, or the first and third embodiments, or the second and third embodiments, or only the second embodiment or only the third embodiment can be applied correspondingly as isolation valve **200** and injection valve **300**.

**[0062]** In a second embodiment, FIGS. 4A and 4B illustrate a combination linear flow through isolation valve **800** and linear flow through injection valve **850** each of which has a configuration similar to the generally cylindrically shaped second

embodiment of rotor **61** illustrated in FIGS. **2A** and **2B**. The linear flow through isolation valve **800** is comprised of a stationary member **802** and a movable member **804**. The movable member **804** is similar to the rotor **202** except that instead of moving in a rotary motion, the movable member **804** moves by sliding linearly through the stationary member **802**. The movable member **804** can have any other type of cross-section such as, for example but not limited to, an oval shape or a square with smooth rounded corners. The rotary member **804** is made preferably of either a metal or a polymer or sapphire.

[0063] The stationary member **802** is comprised of two surfaces **806a** and **806b** which surround the movable slider member **804**. The two surfaces **806a** and **806b** each include self-energized lip seals **808a** and **808b**. The stationary member **802** also forms an interfacing surface **810** surrounding the movable member

[0064] Pin isolation valve **7** from the high pressure pump **101** is inserted into port **352** of the movable member **804** where it is sealed in a manner as to substantially prevent external leakage. Flow is provided from the high pressure pump **101** to the pin isolation valve **7** by means of flexible conduit **316** and coupling **312**. The internal conduit **38** within the pin isolation valve **7** is in fluidic communication with internal conduit **840** within the movable member **804** and with an open port **860** on the interfacing surface **810**. The open port **860** is in fluidic communication with a chamber or volume of space **812** within the stationary member **802** that is bordered by the interfacing surface **810**. The volume of space **812** within the stationary member **802** and the movable member **804** are sealed by the self-energized lip seals **808a** and **808b**. Pin isolation valve **5** penetrates through stationary member **802** at penetration **822** such that the pin valve **5** can move linearly up and down.

[0065] By means of coupling **62**, the internal conduit **58** within pin valve **5** is in fluidic communication with conduit tubing **834** to the pin isolation valve **3** of linear

flow through injection valve **850**. Conduit tubing **66** from the face seal valve **10** is then fluidically coupled to the internal conduit **82** of pin isolation valve **78** by means of coupling **70**.

[0066] Similarly, pin isolation valve **6** penetrates through stationary member **802** at penetration **824** such that the pin valve **6** can move linearly up and down. The internal conduit **82** within pin isolation valve **78** is then in fluidic communication with the volume of space **812** within the stationary member **802** that is bordered by the interfacing surface **810**. The pin valve **6** is positioned to interface with open port **880** on the interfacing surface **810**. The open port **880** is in fluidic communication with the volume of space **812**.

[0067] To seal the pin isolation valves **5** and **6**, the stationary member **802** includes self-energized lip seals **820a** and **820b**, respectively. The lip seals are commercially available from Furon, Inc. of Hoosick Falls, New York.

[0068] During the injection phase, the internal conduit **82** within the pin isolation valve **6** is in fluidic communication also with internal conduit **876** within the movable member **804** and with an open port **874** on an opposite end of movable member **804**. Pin isolation valve **8** is inserted into open port **874** so that the internal conduit **96** within pin valve **8** is in fluid communication with a sample loop **22**. The internal conduit **96** within the pin isolation valve **8** is in fluidic communication with the column by means of flexible conduit **318** that is coupled to the pin valve **8** by coupling **314**.

[0069] During the load phase, the pin isolation valve **6** is positioned to interface with blank port **892** on the surface **810** of movable member **804**. Similarly, the pin isolation valve **5** is positioned to interface with blank port **888** on the surface **810** of movable member **804**. These actions effectively isolate flow from the high pressure

pump to the linear flow through injection valve **850** and to the column in the same manner as discussed previously for the first embodiment.

**[0070]** A means for moving the moving member **804** laterally is provided such as, but not limited to, a linear motor **864** which is coupled to the moving member **804** enables the pins **5** and **6** to be shifted between the open ports **860** and **880** and the blank ports **888** and **892**, respectively.

**[0071]** The linear flow through injection valve **850** is analogous to the rotary injection valve **300**. The linear valve **850** comprises stationary member **802'** and a movable member **804'**. The two members **802'** and **804'** interface at surface **810'**. The movable member **804'** slides along the surface **810'** while the stationary member **802'** remains in place. In this configuration, pin isolation valve **3**, having an internal conduit **58'** and which receives the fluid flow transferred from the high pressure pump through flexible conduit **834**, penetrates the stationary member **802'** at port **822'**. The pin isolation valve **3** is coupled to conduit **834** by means of coupling **62'** and is movably disposed within the stationary member **802'** such that pin isolation valve **3** can move up and down and so that the internal conduit **58** of pin valve **3** is in fluidic communication with a first opening **860'** of a flow through internal conduit **890'** that passes through the movable member **804'** to second opening **880'**. Both the first opening **860'** and the second opening **882'** interface with a chamber or volume of space **812'** within the stationary member **802'** that is bordered by the interfacing surface **810'**. The stationary member **802'** and the movable member **804**, act to seal the chamber **812'**.

**[0072]** Pin isolation valve **4** is movably disposed within the stationary member **802'** in second opening **880'** such that pin isolation valve **4** is in fluidic communication with the second opening **880'** of the enclosed flow through channel **890'**. Pin isolation valve **4**, having an internal conduit **96** and which transfers the fluid flow from the high pressure pump **101** to the column **102** through flexible conduit **836**,

penetrates the stationary member 802' at port 824' and is coupled to flexible conduit 836 by means of coupling 854'. The flexible conduit 836 is coupled to the pin isolation valve 6 of linear isolation valve 800 by means of coupling 70.

[0073] Flexible conduit 852' is fluidically coupled to needle 12 to fluidically couple with the internal conduit 812' of pin isolation valve 1 which is movably disposed within the stationary member 802' such that pin isolation valve 1 can move up and down and so that the internal conduit 812' of pin valve 1 is in fluidic communication with a first opening 892' of an enclosed flow through channel 886' that passes through the movable member 804' to fluidically couple to the sample loop 22 through flexible conduit 834'.

I

[0074] Syringe 32 is fluidically coupled to flexible conduit 856' which in turn fluidically couples with the internal conduit 858' of pin isolation valve 2 which is movably disposed within the stationary member 802' such that pin isolation valve 2 can move up and down and so that the internal conduit 858' of pin valve 2 is in fluidic communication with a first opening 874' of a flow through internal conduit 876' that passes through the movable member 804' to fluidically couple to the sample loop 22 through flexible conduit 836'.

[0075] Open ports 894' and 896' in movable member 804' serve as ends of flow through internal conduit 898' so that when pin 1 and pin 2 are re-positioned to interface with open ports 894' and 896', respectively, the needle 12 and syringe 32 are then fluidically coupled directly to each other and disconnected from the sample loop 22.

[0076] The stationary member 802' is comprised of two surfaces 806a' and 806b' which surround the movable slider member 804'. The two surfaces 806a' and 806b' each include self-energized lip seals 808a' and 808b'. The stationary member 802' also forms an interfacing surface 810' surrounding the movable member 804'.

[0077] To seal the pin isolation valves 1, 2, 3 and 4, the stationary member 802' includes self-energized lip seals 820a' and 820b', respectively.

[0078] A means for moving the moving member 804' laterally is provided such as, but not limited to, a linear motor 864' which is coupled to the moving chamber 804' enables the pins 1 and 2 to be shifted between the open ports 892' and 874', and the open ports 894' and 896', respectively. The linear motor 864' can be driven by any means known in the art such as by electrical, hydraulic or pneumatic power.

[0079] During the load phase, the pin isolation valve 3 is positioned to interface with opening 860' on the surface 810' of movable member 804'. Similarly, the pin isolation valve 4 is positioned to interface with opening 880' also on the surface 810' of movable member 804'. These actions effectively isolate flow from the high pressure pump 101 to the sample loop 22 since the flow from the pump 101 is now recirculated from pin valve 3 through internal conduit 890' to the column 102 through pin isolation valve 4.

[0080] The needle valve 12 is then fluidically coupled to the sample loop 22 by means of the internal conduit 812' of pin isolation valve 1 being fluidically coupled to the opening 894' of internal conduit 898'. Correspondingly, the syringe 32 is fluidically coupled to the sample loop 22 by means of the internal conduit 898' being fluidically coupled to opening 896' of internal conduit 876'. The syringe 32 is then used to aspirate the sample fluid into the sample loop 22 from the needle 12.

[0081] During the transition phase, the moving member 804' is shifted laterally so that pin isolation valve 1 interfaces with opening 894' and pin isolation valve 2 interfaces with opening 896', thereby isolating flow from the needle 12 to the syringe 32. Correspondingly, the internal conduit 58' of pin isolation valve 3 interfaces with

opening 892' of internal conduit 886'. Internal conduit 96' of pin isolation valve 4 interfaces with opening 874' of internal conduit 876'.

[0082] During the injection phase, as a result of the shifting of the moving member 804' during the transition phase, flow from the pump 101 through isolation valve 800 is then channeled through the sample loop 22 and on to the column 102 through the isolation valve 800.

[0083] Another variation of the second embodiment is to design the stationary member 802 and the moving member 804 as a duplex or mirror-image design so that the moving member 804 further comprises ports and internal conduits for the pump and column, or a second pump and column, to be capable of serving a second face seal valve simultaneously.

[0084] Although described with respect to application to high pressure fluids, the various embodiments of the present invention can be applied to fluids at any operating pressure, including sub-atmospheric, i.e., vacuum applications as well.

[0085] The invention has been described herein with reference to particular exemplary embodiments. Certain alterations and modifications may be apparent to those skilled in the art, without departing from the scope of the invention. The exemplary embodiments are meant to be illustrative, not limiting of the scope of the invention, which is defined by the appended claims.



What is claimed is:

1. A flow through injection valve, said flow through injection valve comprising:
  - a stationary member,
  - a movable member, a surface of said stationary member interfacing with a surface of said movable member; and
  - at least one pin isolation valve;
  - said at least one pin isolation valve having a flow through internal conduit,
  - said at least one pin isolation valve movably disposed so that said internal conduit is capable of fluidically communicating with at least one flow through conduit in said movable member,
  - said at least one pin isolation valve movably disposed so that said internal conduit is capable of fluidically communicating with another flow through conduit in said movable member.
2. The flow through injection valve according to claim 1 wherein said movable member comprises:
  - first and second conduits for interfacing with internal conduits of first and second pin isolation valves, said first and second conduits opening to a surface of said movable member ;
  - a third conduit enabling fluidic communication between said internal conduits of said first and second pin isolation valves; and
  - a fourth conduit enabling fluidic communication between internal conduits of third and fourth pin isolation valves, said third pin isolation valve providing fluid flow, said fourth pin isolation valve exhausting said fluid flow.
3. The flow through injection valve according to claim 1, wherein  
said movable member moves by rotation around an axis of rotation.

4. The flow through injection valve according to claim 1, wherein said movable member moves by at least one of linear and curvilinear translation.
5. The flow through injection valve according to claim 1, wherein one of said at least one pin isolation valves is fluidically coupled to a sample loop of a high pressure liquid chromatography (HPLC) system.
6. The flow through injection valve according to claim 1, wherein one of said at least one pin isolation valves is in fluidic communication with a pump supplying high pressure liquid to a high pressure liquid chromatography (HPLC) system.
7. The flow through injection valve according to claim 1, wherein one of said at least one pin isolation valves is fluidically coupled to a column discharging high pressure liquid from a high pressure liquid chromatography (HPLC) system.
8. A flow through injection valve,  
said injection valve disposed around an axis of rotation,  
said injection valve comprising:
  - at least two opposing valve ends disposed around the axis of rotation;
  - a movable member comprising a rotor disposed between said valve ends, an axis of rotation of said rotor being one of parallel and coincident with the axis of rotation of said injection valve, said rotor disposed such that orientation of said rotor can change by rotation around the axis of rotation of said rotor,
  - said rotor having
  - an outer surface;
  - at least two opposing surfaces each intersecting said outer surface;
  - a first flow-through conduit having an opening on a first of said at least two opposing surfaces and an opening on a second of said at least two opposing surfaces;

a second flow-through conduit having an opening on a first of said at least two opposing surfaces and an opening on a second of said at least two opposing surfaces;

a flow through conduit having an opening on said outer surface and an opening on said first of said at least two opposing surfaces;

a flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces;

a first sealing annulus for sealing said openings on said first of said at least two opposing surfaces;

a second sealing annulus for sealing said openings on said second of said at least two opposing surfaces;

a first pin isolation valve having an internal conduit, said first pin isolation valve disposed to move parallel to the axis of rotation of said injection valve, said first pin isolation valve movably disposed so as to be capable of fluidically communicating, through said internal conduit, with said opening on said first flow-through channel on said first of said at least two opposing surfaces,

said first pin isolation valve movably disposed so as to be capable of fluidically communicating, through said internal conduit, with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces;

a second pin isolation valve having an internal conduit, said second pin isolation valve disposed to move parallel to the centerline of said injection valve,

said second pin isolation valve movably disposed so as to be capable of fluidically communicating, through said internal conduit, with said opening on said first flow-through channel on said second of said at least two opposing surfaces,

said second pin isolation valve movably disposed so as to be capable of fluidically communicating, through said internal conduit, with said flow through

conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces;

a third pin isolation valve having an internal conduit, said third pin isolation valve disposed to move parallel to the centerline of said injection valve,

said third pin isolation valve movably disposed so as to be capable of fluidically communicating, through said internal conduit, with said opening on said second flow-through channel on said first of said at least two opposing surfaces,

said third pin isolation valve movably disposed so as to be capable of fluidically communicating, through said internal conduit, with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces; and

a fourth pin isolation valve having an internal conduit, said fourth pin isolation valve disposed to move parallel to the centerline of said injection valve,

said fourth pin isolation valve movably disposed so as to be capable of fluidically communicating, through said internal conduit, with said opening on said second flow-through channel on said second of said at least two opposing surfaces,

said fourth pin isolation valve movably disposed so as to be capable of fluidically communicating, through said internal conduit, with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces.

9. The flow through injection valve according to claim 8, wherein said rotor further comprises:

a rotor clamp having an outer surface and an inner surface, the inner surface surrounding at least a portion of the outer surface of said rotor;

a first opening on the outer surface of said rotor clamp penetrating said rotor clamp to coincide with said first opening on said outer surface of said rotor;  
and

a second opening on the outer surface of said rotor clamp penetrating said rotor clamp to coincide with said second opening on said outer surface of said rotor.

10. The flow through injection valve according to claim 9, wherein said rotor clamp further comprises drive means for driving said rotor to rotate around the axis of rotation of said rotor.

11. The flow through injection valve according to claim 10, wherein said rotor clamp drive means comprises a gear drive operator.

12. The flow through injection valve according to claim 10, wherein said rotor clamp drive means comprises a handle operator.

13. The flow through injection valve according to claim 8, wherein at least one of said valve ends comprises:

a stator enclosing said at least one pin isolation valve,  
said stator adjacent to said rotor;

a sealing layer enclosed within said stator and enclosing said at least one pin isolation valve for sealing said at least one pin isolation valve;

a Belleville spring washer;

a Belleville spring;

a load washer; and

a spherical nut,

said Belleville spring washer, said Belleville spring, said load washer  
and said spherical nut axially arranged to impose an axial force for sealing said  
sealing layer enclosing said pin isolation valve.

14. The flow through injection valve according to claim 13, wherein said sealing layer is comprised of at least one of PEEK (polyetheretherketone) and PTFE (polytetrafluorethylene)
15. The flow through injection valve according to claim 8, wherein said rotor is comprised of PEEK blend.
16. The flow through injection valve according to claim 9, wherein said rotor clamp is comprised of stainless steel.
17. The flow through injection valve according to claim 16, wherein said stainless steel is Type 316 stainless steel.
18. The flow through injection valve according to claim 8, wherein either of said first and second pin isolation valves is fluidically coupled to a sample loop of a high pressure liquid chromatography (HPLC) system.
19. The flow through injection valve according to claim 8, wherein either of said third and fourth pin isolation valves is in fluidic communication with a pump supplying high pressure liquid to a high pressure liquid chromatography (HPLC) system.
20. The flow through injection valve according to claim 8, wherein either of said third and fourth pin isolation valves is in fluidic communication with a column discharging high pressure liquid to a high pressure liquid chromatography (HPLC) system.
21. A flow through injection valve comprising:

a stationary member and a movable member interfacing at a surface, said movable member disposed to slide along said surface;

a chamber disposed between said stationary member and said movable member, said chamber bounded by said surface;

said movable member having a first flow through conduit having a first opening interfacing with said chamber and a second opening on a surface of said movable member not interfacing with said chamber,

said movable member having a second flow through conduit having a first opening interfacing with said chamber and a second opening on a surface of said movable member not interfacing with said chamber,

said movable member having a third flow through conduit having a first opening and a second opening each on a surface of said movable member interfacing with said chamber; and

said movable member having a fourth flow through conduit having a first opening and a second opening each on a surface of said movable member interfacing with said chamber.

22. The flow through injection valve according to claim 21, further comprising:

at least one of (a) first pin isolation valve, (b) second pin isolation valve, (c) third pin isolation valve, and (d) fourth pin isolation valve;

said first pin isolation valve having an internal conduit,

said first pin isolation valve movably disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit can be in fluidic communication with said first opening on said first flow through conduit of said movable member,

said first pin isolation valve movably disposed so that said internal conduit can be in fluidic communication with said first opening of said third conduit within said chamber,

said second pin isolation valve having an internal conduit,

said second pin isolation valve movably disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit can be in fluidic communication with said first opening on said second flow through conduit of said movable member,

said second pin isolation valve movably disposed so that said internal conduit can be in fluidic communication with said first opening on said second flow through conduit of said movable member,

said third pin isolation valve having an internal conduit,

said third pin isolation valve movably disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit can be in fluidic communication with said first opening of said fourth flow through conduit,

said third pin isolation valve movably disposed so that said internal conduit can be in fluidic communication with said first opening of said first flow through conduit,

said fourth pin isolation valve having an internal conduit,  
said fourth pin isolation valve movably disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit can be in fluidic communication with said second opening of said fourth flow through conduit,

said fourth pin isolation valve movably disposed so that said internal conduit can be in fluidic communication with said second opening of said second flow through conduit.

23. The flow through injection valve according to claim 21, further comprising a housing enclosing said stationary member and said movable member.

24. The flow through injection valve according to claim 22, further comprising a housing enclosing said stationary member and said movable



member and at least one of said pin isolation valves, said internal conduit of said at least one pin isolation valve fluidically coupled to a conduit penetrating said housing.

25. The flow through injection valve according to claim 21, further comprising driving means for driving at least one of said movable members.
26. The flow through injection valve according to claim 25, wherein said driving means is a linear electric motor.
27. The flow through injection valve according to claim 21, wherein either of said first and second pin isolation valves of said flow through injection valve is fluidically coupled to a sample loop of a high pressure liquid chromatography (HPLC) system.
28. The flow through injection valve according to claim 21, wherein either of said third and fourth pin isolation valves of said flow through injection valve is in fluidic communication with a pump supplying high pressure liquid to a high pressure liquid chromatography (HPLC) system.
29. The flow through injection valve according to claim 21, wherein either of said third and fourth pin isolation valves of said flow through injection valve is in fluidic communication with a column discharging high pressure liquid from a high pressure liquid chromatography (HPLC) system.
30. The flow through injection valve according to claim 23, wherein said housing of said flow through injection valve is capable of retaining pressure greater than atmospheric pressure.

31. The flow through injection valve according to claim 4, wherein said movable member is comprised of PEEK (polyetheretherketone) blend.
32. The flow through injection valve according to claim 4, wherein said movable member consists of at least one of (a) metal, (b) polymer, and (c) sapphire.
33. The flow through injection valve according to claim 4, wherein said interfacing surface between said stationary member and said movable member of said linear injection valve is sealed by at least one lip seal.
34. The flow through injection valve according to claim 21, wherein at least one of said openings of said pin isolation valves is sealed by a lip seal.
35. The multiple valve according to claim 33, wherein said lip seal is self-energizing.
36. The multiple valve according to claim 34, wherein said lip seal is self-energizing.
37. A multiple valve comprised of:  
a housing;  
a rotary flow through isolation valve disposed within said housing, said isolation valve oriented in an axial direction for isolation of fluid flow ,  
said isolation valve disposed around a centerline oriented in an axial direction, said isolation valve comprising:  
at least two opposing valve ends disposed around the centerline;  
a rotor disposed between said valve ends, a centerline of said rotor being substantially parallel and coincident with the centerline of said isolation

valve, said rotor disposed such that orientation of said rotor can change by rotation around the centerline of said rotor, said rotor having

- an outer surface;

- at least two opposing surfaces each intersecting said outer surface;

- a flow-through conduit having an opening on a first of said at least two opposing surfaces and an opening on a second of said at least two opposing surfaces;

- a flow through conduit having an opening on said outer surface and an opening on said first of said at least two opposing surfaces,

- a flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces,

- at least one blank opening on said first of said at least two opposing surfaces,

- at least one blank opening on said second of said at least two opposing surfaces,

- a first sealing annulus for sealing said openings on said first of said at least two opposing surfaces; and

- a second sealing annulus for sealing said openings on said second of said at least two opposing surfaces

- a first pin isolation valve, said first pin isolation valve disposed to move along the centerline of said isolation valve,

- said first pin isolation valve movably disposed so as to be capable of fluidically communicating with said at least one blank opening on said first of said at least two opposing surfaces,

- said first pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on a second of said at least two opposing surfaces;

a second pin isolation valve, said second pin isolation valve disposed to move along the centerline of said isolation valve;

said second pin isolation valve movably disposed so as to be capable of fluidically communicating with said at least one blank opening on said second of said at least two opposing surfaces,

said second pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces; and

a rotary flow through injection valve disposed within said housing for isolation of the fluid flow to a downstream receptacle,

said injection valve disposed around a centerline oriented in an axial direction, said injection valve comprising:

at least two opposing valve ends disposed around the centerline;

a rotor disposed between said valve ends, a centerline of said rotor being one of parallel and coincident with the centerline of said injection valve, said rotor disposed such that orientation of said rotor can change by rotation around the centerline of said rotor,

said rotor having

an outer surface;

at least two opposing surfaces each intersecting said outer surface;

a first flow-through conduit having an opening on a first of said at least two opposing surfaces and an opening on a second of said at least two opposing surfaces;

a second flow-through conduit having an opening on a first of said at least two opposing surfaces and an opening on a second of said at least two opposing surfaces; a flow through conduit having an opening on said outer surface and an opening on said first of said at least two opposing surfaces;

a flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces;

a first sealing annulus for sealing said openings on said first of said at least two opposing surfaces;

a second sealing annulus for sealing said openings on said second of said at least two opposing surfaces;

a first pin isolation valve having an internal conduit, said first pin isolation valve disposed to move parallel to the centerline of said injection valve, said first pin isolation valve movably disposed so as to be capable of fluidically communicating with said opening on said first flow-through channel on said first of said at least two opposing surfaces,

said first pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces;

a second pin isolation valve having an internal conduit, said second pin isolation valve disposed to move parallel to the centerline of said injection valve,

said second pin isolation valve movably disposed so as to be capable of fluidically communicating with said opening on said first flow-through channel on said second of said at least two opposing surfaces,

said second pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces;

a third pin isolation valve having an internal conduit, said third pin isolation valve disposed to move parallel to the centerline of said injection valve,

said third pin isolation valve movably disposed so as to be capable of fluidically communicating with said opening on said second flow-through channel on said first of said at least two opposing surfaces,

said third pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces; and

a fourth pin isolation valve having an internal conduit, said fourth pin isolation valve disposed to move parallel to the centerline of said injection valve

said fourth pin isolation valve movably disposed so as to be capable of fluidically communicating with said opening on said second flow-through channel on said second of said at least two opposing surfaces,

said fourth pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces.

38. The multiple valve according to claim 37, wherein said first pin isolation valve of said rotary flow through isolation valve is fluidically coupled to said third pin isolation valve of said rotary flow through injection valve.
39. The multiple valve according to claim 37, wherein said second pin isolation valve of said rotary flow through isolation valve is fluidically coupled to said fourth pin isolation valve of said rotary flow through injection valve.
40. The multiple valve according to claim 37, wherein either of said rotors further comprises:
- a rotor clamp having an outer surface and an inner surface, the inner surface surrounding at least a portion of the outer surface of said rotor ,
  - a first opening on the outer surface of said rotor clamp penetrating said rotor clamp to coincide with said first opening on said outer surface of said rotor,
  - and

a second opening on the outer surface of said rotor clamp penetrating said rotor clamp to coincide with said second opening on said outer surface of said rotor.

41. The multiple valve according to claim 40, wherein said rotary flow through isolation valve further comprises at least one of a (a) third pin isolation valve, and (b) fourth pin isolation valve;

said third pin isolation valve having an internal conduit, said rotary flow through third pin isolation valve disposed within said first opening on said outer surface of said rotor clamp so that said internal conduit of said third pin isolation valve is disposed to be in fluidic communication with said opening on said outer surface of said flow through conduit having an opening on said outer surface and an opening on said first of said at least two surfaces intersecting said outer surface of said rotor,

said fourth pin isolation valve having an internal conduit, said fourth pin isolation valve disposed within said second opening on said outer surface of said rotor clamp so that said internal conduit of said fourth pin isolation valve is disposed to be in fluidic communication with said opening on said outer surface of said flow through conduit having an opening on said outer surface and an opening on said second of said at least two surfaces intersecting said outer surface of said rotor.

42. The multiple valve according to claim 40, wherein said rotor clamp further comprises drive means for driving said rotor to rotate around the centerline of said rotor.

43. The multiple valve according to claim 42, wherein said rotor clamp drive means comprises a gear drive operator.

44. The multiple valve according to claim 42, wherein said rotor clamp drive means comprises a handle operator.
45. The multiple valve according to claim 37, wherein at least one of said valve ends comprises:
- a stator enclosing said at least one pin isolation valve,
  - said stator adjacent to said rotor;
  - a sealing layer enclosed within said stator and enclosing said at least one pin isolation valve for sealing said at least one pin isolation valve;
  - a Belleville spring washer;
  - a Belleville spring;
  - a load washer; and
  - a spherical nut,
- said Belleville spring washer, said Belleville spring, said load washer and said spherical nut axially arranged to impose an axial force for sealing said sealing layer enclosing said pin isolation valve.
46. The multiple valve according to claim 45, wherein said sealing layer is comprised of at least one of PEEK (polyetheretherketone) and PTFE (polytetrafluorethylene)
47. The multiple valve according to claim 37, wherein at least one of said rotors is comprised of PEEK blend.
48. The multiple valve according to claim 40, wherein said rotor clamp is comprised of stainless steel.
49. The multiple valve according to claim 48, wherein said stainless steel is Type 316 stainless steel.



50. The multiple valve according to claim 37, wherein either of said first and second pin isolation valves of said rotary flow through injection valve is fluidically coupled to a sample loop of a high pressure liquid chromatography (HPLC) system.
51. The multiple valve according to claim 41, wherein either of said third and fourth pin isolation valves of said rotary flow through isolation valve is fluidically coupled to a pump supplying high pressure liquid to a high pressure liquid chromatography (HPLC) system.
52. The multiple valve according to claim 41, wherein either of said third and fourth pin isolation valves of said rotary flow through isolation valve is fluidically coupled to a column discharging high pressure liquid to a high pressure liquid chromatography (HPLC) system.
53. A multiple valve comprised of:
- a housing;
  - a rotary flow through isolation valve disposed within said housing, said isolation valve oriented in an axial direction for isolation of fluid flow ,
  - said isolation valve disposed around an axis of rotation, said isolation valve comprising:
    - at least two opposing valve ends disposed around the axis of rotation;
    - a rotor disposed between said valve ends, an axis of rotation of said rotor being substantially parallel and coincident with the axis of rotation of said isolation valve, said rotor disposed such that orientation of said rotor can change by rotation around the axis of rotation of said rotor, said rotor having
      - an outer surface,
      - at least two opposing surfaces each intersecting said outer surface;

a flow-through conduit having an opening on a first of said at least two opposing surfaces and an opening on a second of said at least two opposing surfaces;

a flow through conduit having an opening on said outer surface and an opening on said first of said at least two opposing surfaces;

a flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces,

at least one blank opening on said first of said at least two opposing surfaces;

at least one blank opening on said second of said at least two opposing surfaces;

a first sealing annulus for sealing said openings on said first of said at least two opposing surfaces, and

a second sealing annulus for sealing said openings on said second of said at least two opposing surfaces;

a first pin isolation valve, said first pin isolation valve disposed to move along the centerline of said isolation valve,

said first pin isolation valve movably disposed so as to be capable of fluidically communicating with said at least one blank opening on said first of said at least two opposing surfaces,

said first pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on a second of said at least two opposing surfaces;

a second pin isolation valve, said second pin isolation valve disposed to move along the centerline of said isolation valve,

said second pin isolation valve movably disposed so as to be capable of fluidically communicating with said at least one blank opening on said second of said at least two opposing surfaces,

said second pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces; and

a linear flow through injection valve, said injection valve comprising:

a stationary member;

a movable member;

said stationary member and said movable member interfacing at a surface, said movable member disposed to slide along said surface;

a chamber disposed between said stationary member and said movable member, said chamber bounded by said surface;

said movable member having a first flow through conduit having a first opening interfacing with said chamber and a second opening on a surface of said movable member not interfacing with said chamber,

said movable member having a second flow through conduit having a first opening interfacing with said chamber and a second opening on a surface of said movable member not interfacing with said chamber,

said movable member having a third flow through conduit having a first opening and a second opening each on a surface of said movable member interfacing with said chamber;

said movable member having a fourth flow through conduit having a first opening and a second opening each on a surface of said movable member interfacing with said chamber; and

a second blank opening on said surface bounding said chamber.

54. The multiple valve according to claim 53, wherein said linear flow through injection valve further comprises:

at least one of (a) first pin isolation valve, (b) second pin isolation valve, (c) third pin isolation valve, and (d) fourth pin isolation valve;

said first pin isolation valve having an internal conduit,

said first pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said first pin isolation valve is movably disposed to be in fluidic communication with said first opening on a first flow through conduit of said movable member,

said internal conduit of said first pin isolation valve movably disposed to be in fluidic communication with said first opening of said third fluid flow through conduit,

said second pin isolation valve having an internal conduit,

said second pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said second pin isolation valve is movably disposed to be in fluidic communication with said first opening on a second flow through conduit of said movable member,

said internal conduit of said second pin isolation valve movably disposed to be in fluidic communication with said second opening of said third flow through conduit,

said third pin isolation valve having an internal conduit,

said third pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said third pin isolation valve is movably disposed to be in fluidic communication with said first opening of said fourth flow through conduit,

said internal conduit of said third pin isolation valve movably disposed to be in fluidic communication with said first opening of said first flow through conduit,

said fourth pin isolation valve having an internal conduit,

said fourth pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said fourth pin isolation valve is movably disposed to be in fluidic communication with said second opening of said fourth flow through conduit,

said internal conduit of said fourth pin isolation valve movably disposed to be in fluidic communication with said first opening on said second flow through conduit.

55. The multiple valve according to claim 53, wherein said linear flow through injection valve further comprises a housing enclosing said stationary member and said movable member.
56. The multiple valve according to claim 54, wherein said linear flow through injection valve further comprises a housing enclosing said stationary member and said movable member and at least one of said pin isolation valves, said internal conduit of said at least one pin isolation valve fluidically coupled to a conduit penetrating said housing.
57. The multiple valve according to claim 53, wherein said linear injection valve further comprises drive means for moving said movable member.
58. The multiple valve according to claim 57, wherein said drive means is a linear motor.
59. The multiple valve according to claim 54, wherein either of said first and second pin isolation valves of said linear injection valve is fluidically coupled to a sample loop of a high pressure liquid chromatography (HPLC) system.
60. The multiple valve according to claim 54, wherein either of said third and fourth pin isolation valves of said rotary isolation valve is fluidically coupled to a

pump supplying high pressure liquid to a high pressure liquid chromatography (HPLC) system.

61. The multiple valve according to claim 54, wherein either of said third and fourth pin isolation valves of said rotary isolation valve is fluidically coupled to a column discharging high pressure liquid from a high pressure liquid chromatography (HPLC) system.
62. The multiple valve according to claim 55, wherein said housing of said linear injection valve is capable of retaining pressure greater than atmospheric pressure.
63. The multiple valve according to claim 56, wherein said housing of said linear injection valve is capable of retaining pressure greater than atmospheric pressure.
64. The multiple valve according to claim 53, wherein said movable member is comprised of PEEK (polyetheretherketone) blend.
65. The multiple valve according to claim 53, wherein said first pin isolation valve of said flow through isolation valve is fluidically coupled to said third pin isolation valve of said flow through injection valve.
66. The multiple valve according to claim 53, wherein said second pin isolation valve of said rotary flow through isolation valve is fluidically coupled to said fourth pin isolation valve of said rotary flow through injection valve.
67. The multiple valve according to claim 53, wherein said rotor further comprises

a rotor clamp having an outer surface and an inner surface, the inner surface surrounding at least a portion of the outer surface of said rotor,

a first opening on the outer surface of said rotor clamp penetrating said rotor clamp to coincide with said first opening on said outer surface of said rotor, and

a second opening on the outer surface of said rotor clamp penetrating said rotor clamp to coincide with said second opening on said outer surface of said rotor.

68. The multiple valve according to claim 67, wherein said rotary flow through isolation valve further comprises at least one of a (a) third pin isolation valve, and (b) fourth pin isolation valve;

said third pin isolation valve having an internal conduit, said third pin isolation valve disposed within said first opening on said outer surface of said rotor clamp so that said internal conduit of said third pin isolation valve is disposed to be in fluidic communication with said opening on said outer surface of said flow through conduit having an opening on said outer surface and an opening on said first of said at least two surfaces intersecting said outer surface of said rotor,

said fourth pin isolation valve having an internal conduit, said fourth pin isolation valve disposed within said second opening on said outer surface of said rotor clamp so that said internal conduit of said fourth pin isolation valve is disposed to be in fluidic communication with said opening on said outer surface of said flow through conduit having an opening on said outer surface and an opening on said second of said at least two surfaces intersecting said outer surface of said rotor.

69. The multiple valve according to claim 68, wherein at least one of said third and fourth pin isolation valves of said rotary flow through isolation valve is disposed within one of said openings on said outer surface of said rotor clamp by means of a threaded compression connection.

70. The multiple valve according to claim 67, wherein said rotor clamp further comprises drive means for driving said rotor to rotate around the axis of rotation of said rotor.
71. The multiple valve according to claim 70, wherein said rotor clamp drive means comprises a gear drive operator.
72. The multiple valve according to claim 70, wherein said rotor clamp drive means comprises a handle operator.
73. The multiple valve according to claim 53, wherein said interfacing surface between said stationary member and said movable member of said linear injection valve is sealed by at least one lip seal.
74. The multiple valve according to claim 54, wherein at least one of said openings of said pin isolation valves of said linear injection valve is sealed by a lip seal.
75. The multiple valve according to claim 73 wherein said lip seal is self-energizing.
76. The multiple valve according to claim 74, wherein said lip seal is self-energizing.
77. The flow through isolation valve according to claim 53, wherein said movable member consists of at least one of (a) metal, (b) polymer, and (c) sapphire.
78. The multiple valve according to claim 53, wherein at least one of said valve ends comprises:



a stator enclosing said at least one pin isolation valve,  
said stator adjacent to said rotor;  
a sealing layer enclosed within said stator and enclosing said at least one pin isolation valve for sealing said at least one pin isolation valve;  
a Belleville spring washer;  
a Belleville spring;  
a load washer; and  
a spherical nut,  
said Belleville spring washer, said Belleville spring, said load washer and said spherical nut axially arranged to impose an axial force for sealing said sealing layer enclosing said pin isolation valve.

79. The multiple valve according to claim 78, wherein said sealing layer is comprised of at least one of PEEK (polyetheretherketone) and PTFE (polytetrafluorethylene)

80. The multiple valve according to claim 53, wherein said rotor is comprised of PEEK blend.

81. The multiple valve according to claim 67, wherein said rotor clamp is comprised of stainless steel.

82. The multiple valve according to claim 81, wherein said stainless steel is ASTM Type 316 stainless steel.

83. A multiple valve comprised of:  
a housing;  
a linear flow through isolation valve disposed within said housing,  
said isolation valve comprising  
a stationary member;

a movable member;

said stationary member and said movable member interfacing at a surface,  
said movable member disposed to slide along said surface;

a chamber disposed between said stationary member and said  
movable member, said chamber bounded by said surface;

said movable member having a first flow through conduit having an  
opening interfacing with said chamber and an opening on a surface of said  
movable member not interfacing with said chamber,

said movable member having a second flow through conduit having an  
opening interfacing with said chamber and an opening on a surface of said  
movable member not interfacing with said chamber,

a first blank opening on said surface bounding said chamber, and

a second blank opening on said surface bounding said chamber; and

a rotary flow through injection valve disposed within said housing for  
isolation of the fluid flow to a downstream receptacle,

said injection valve disposed around a an axis of rotation oriented in said  
injection valve comprising:

at least two opposing valve ends disposed around the centerline;

a rotor disposed between said valve ends, a centerline of said rotor  
being one of parallel and coincident with the centerline of said injection valve,  
said rotor disposed such that orientation of said rotor can change by rotation  
around the centerline of said rotor,  
said rotor having

an outer surface,

at least two opposing surfaces each intersecting said outer surface,

a first flow-through conduit having an opening on a first of said at least  
two opposing surfaces and an opening on a second of said at least two opposing  
surfaces;

a second flow-through conduit having an opening on a first of said at least two opposing surfaces and an opening on a second of said at least two opposing surfaces;

a flow through conduit having an opening on said outer surface and an opening on said first of said at least two opposing surfaces;

a flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces;

a first sealing annulus for sealing said openings on said first of said at least two opposing surfaces;

a second sealing annulus for sealing said openings on said second of said at least two opposing surfaces;

a first pin isolation valve, said first pin isolation valve disposed to move parallel to the centerline of said injection valve, said first pin isolation valve movably disposed so as to be capable of fluidically communicating with said opening on said first flow-through channel on said first of said at least two opposing surfaces,

said first pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces;

a second pin isolation valve, said second pin isolation valve disposed to move parallel to the centerline of said injection valve,

said second pin isolation valve movably disposed so as to be capable of fluidically communicating with said opening on said first flow-through channel on said second of said at least two opposing surfaces;

said second pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces;

a third pin isolation valve, said third pin isolation valve disposed to move parallel to the centerline of said injection valve,

said third pin isolation valve movably disposed so as to be capable of fluidically communicating with said opening on said second flow-through channel on said first of said at least two opposing surfaces,

said third pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces; and

a fourth pin isolation valve, said fourth pin isolation valve disposed to move parallel to the centerline of said injection valve,

said fourth pin isolation valve movably disposed so as to be capable of fluidically communicating with said opening on said second flow-through channel on said second of said at least two opposing surfaces,

said fourth pin isolation valve movably disposed so as to be capable of fluidically communicating with said flow through conduit having an opening on said outer surface and an opening on said second of said at least two opposing surfaces.

84. The multiple valve according to claim 83, wherein said linear flow through isolation valve further comprises:  
at least one of a (a) first pin isolation valve, (b) second pin isolation valve, (c) third pin isolation valve, and (d) fourth pin isolation valve;  
said first pin isolation valve having an internal conduit,  
said first pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said first pin isolation valve is movably disposed to be in fluidic communication with said first opening on a first flow through conduit of said movable member,

said internal conduit of said first pin isolation valve movably disposed to be in fluidic communication with said first blank opening on said surface bounding said chamber,

said second pin isolation valve having an internal conduit,  
said second pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said second pin isolation valve is movably disposed to be in fluidic communication with said first opening on a second flow through conduit of said movable member,  
said internal conduit of said second pin isolation valve movably disposed to be in fluidic communication with said second blank opening on said surface bounding said chamber,

said third pin isolation valve having an internal conduit,

said third pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said third pin isolation valve is movably disposed to be in fluidic communication with said first opening of said third flow through conduit,  
said internal conduit of said third pin isolation valve movably disposed to be in fluidic communication with said first blank opening on said surface bounding said chamber,

said fourth pin isolation valve having an internal conduit,

said fourth pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said fourth pin isolation valve is movably disposed to be in fluidic communication with said second opening of said third flow through conduit,  
said internal conduit of said fourth pin isolation valve movably disposed to be in fluidic communication with said second blank opening on said surface bounding said chamber.

85. The multiple valve according to claim 83, wherein said linear flow through isolation valve further comprises a housing enclosing said stationary member and said movable member.
86. The multiple valve according to claim 84, wherein said linear flow through isolation valve further comprises a housing enclosing said stationary member and said movable member and at least one of said pin isolation valves, said internal conduit of said at least one pin isolation valve fluidically coupled to a conduit penetrating said housing.
87. The multiple valve according to claim 83, wherein said linear isolation valve further comprises drive means for moving said movable member.
88. The multiple valve according to claim 87, wherein said drive means is a linear motor.
89. The multiple valve according to claim 84, wherein either of said first and second pin isolation valves of said rotary injection valve is fluidically coupled to a sample loop of a high pressure liquid chromatography (HPLC) system.
90. The multiple valve according to claim 84, wherein either of said third and fourth pin isolation valves of said linear isolation valve is fluidically coupled to a pump supplying high pressure liquid to a high pressure liquid chromatography (HPLC) system.
91. The multiple valve according to claim 84, wherein either of said third and fourth pin isolation valves of said linear isolation valve is fluidically coupled to a column discharging high pressure liquid from a high pressure liquid chromatography (HPLC) system.

92. The multiple valve according to claim 85, wherein said housing of said linear isolation valve is capable of retaining pressure greater than atmospheric pressure.
93. The multiple valve according to claim 86, wherein said housing of said linear isolation valve is capable of retaining pressure greater than atmospheric pressure.
94. The multiple valve according to claim 83, wherein said movable member is comprised of PEEK (polyetheretherketone) blend.
95. The multiple valve according to claim 83, wherein said first pin isolation valve of said linear isolation valve is fluidically coupled to said third pin isolation valve of said rotary injection valve.
96. The multiple valve according to claim 83, wherein said second pin isolation valve of said linear isolation valve is fluidically coupled to said fourth pin isolation valve of said rotary injection valve.
97. The multiple valve according to claim 83, wherein said rotor further comprises
- a rotor clamp having an outer surface and an inner surface, the inner surface surrounding at least a portion of the outer surface of said rotor ,
  - a first opening on the outer surface of said rotor clamp penetrating said rotor clamp to coincide with said first opening on said outer surface of said rotor, and
  - a second opening on the outer surface of said rotor clamp penetrating said rotor clamp to coincide with said second opening on said outer surface of said rotor.

98. The multiple valve according to claim 97, wherein said rotary flow through injection valve further comprises at least one of a (a) third pin isolation valve, and (b) fourth pin isolation valve;
- said third pin isolation valve having an internal conduit, said third pin isolation valve disposed within said first opening on said outer surface of said rotor clamp so that said internal conduit of said third pin isolation valve is disposed to be in fluidic communication with said opening on said outer surface of said flow through conduit having an opening on said outer surface and an opening on said first of said at least two surfaces intersecting said outer surface of said rotor,
- said fourth pin isolation valve having an internal conduit, said fourth pin isolation valve disposed within said second opening on said outer surface of said rotor clamp so that said internal conduit of said fourth pin isolation valve is disposed to be in fluidic communication with said opening on said outer surface of said flow through conduit having an opening on said outer surface and an opening on said second of said at least two surfaces intersecting said outer surface of said rotor.
99. The multiple valve according to claim 98, wherein at least one of said third and fourth pin isolation valves is disposed within one of said openings on said outer surface of said rotor clamp by means of a threaded compression connection.
100. The multiple valve according to claim 97, wherein said rotor clamp further comprises drive means for driving said rotor to rotate around the centerline of said rotor.
101. The multiple valve according to claim 100, wherein said rotor clamp drive means comprises a gear drive operator.
102. The multiple valve according to claim 100, wherein said rotor clamp drive means comprises a handle operator.



103. The multiple valve according to claim 83, wherein at least one of said valve ends comprises:
- a stator enclosing said at least one pin isolation valve,
  - said stator adjacent to said rotor;
  - a sealing layer enclosed within said stator and enclosing said at least one pin isolation valve for sealing said at least one pin isolation valve;
  - a Belleville spring washer;
  - a Belleville spring;
  - a load washer; and
  - a spherical nut,
- said Belleville spring washer, said Belleville spring, said load washer and said spherical nut axially arranged to impose an axial force for sealing said sealing layer enclosing said pin isolation valve.
104. The multiple valve according to claim 103, wherein said sealing layer is comprised of at least one of PEEK (polyetheretherketone) and PTFE (polytetrafluorethylene)
105. The multiple valve according to claim 83, wherein said rotor is comprised of PEEK blend.
106. The multiple valve according to claim 97, wherein said rotor clamp is comprised of stainless steel.
107. The multiple valve according to claim 106, wherein said stainless steel is ASTM Type 316 stainless steel.

108. The multiple valve according to claim 83, wherein said interfacing surface between said stationary member and said movable member of said linear isolation valve is sealed by at least one lip seal.
109. The multiple valve according to claim 84, wherein at least one of said openings of said pin isolation valves of said linear isolation valve is sealed by a lip seal.
110. The multiple valve according to claim 108 wherein said lip seal is self-energizing.
111. The multiple valve according to claim 109, wherein said lip seal is self-energizing.
112. The flow through isolation valve according to claim 56, wherein said movable member consists of at least one of (a) metal, (b) polymer, and (c) sapphire.
113. A multiple valve comprised of:
- a housing;
  - a linear flow through isolation valve disposed within said housing,
- said isolation valve comprising:
- a stationary member;
  - a movable member,
- said stationary member and said movable member interfacing at a surface, said movable member disposed to slide along said surface;
- a chamber disposed between said stationary member and said movable member, said chamber bounded by said surface;

said movable member having a first flow through conduit having an opening interfacing with said chamber and an opening on a surface of said movable member not interfacing with said chamber,

said movable member having a second flow through conduit having an opening interfacing with said chamber and an opening on a surface of said movable member not interfacing with said chamber,

a first blank opening on said surface bounding said chamber, and  
a second blank opening on said surface bounding said chamber; and

a linear flow through injection valve, said injection valve  
comprising

a stationary member;

a movable member,

said stationary member and said movable member interfacing at a surface, said movable member disposed to slide along said surface;

a chamber disposed between said stationary member and said movable member, said chamber bounded by said surface;

said movable member having a first flow through conduit having a first opening interfacing with said chamber and a second opening on a surface of said movable member not interfacing with said chamber,

said movable member having a second flow through conduit having a first opening interfacing with said chamber and a second opening on a surface of said movable member not interfacing with said chamber,

said movable member having a third flow through conduit having a first opening and a second opening each on a surface of said movable member interfacing with said chamber,

said movable member having a fourth flow through conduit having a first opening and a second opening each on a surface of said movable member interfacing with said chamber,

114. The multiple valve according to claim 113, wherein said flow through injection valve further comprises:  
at least one of a (a) first pin isolation valve, (b) second pin isolation valve, (c) third pin isolation valve, and (d) fourth pin isolation valve;

said first pin isolation valve having an internal conduit,

said first pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said first pin isolation valve is movably disposed to be in fluidic communication with said first opening on a first flow through conduit of said movable member, said internal conduit of said first pin isolation valve movably disposed to be in fluidic communication with said first opening of said third flow through conduit,

said second pin isolation valve having an internal conduit,

said second pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said second pin isolation valve is movably disposed to be in fluidic communication with said first opening on a second flow through conduit of said movable member,

said internal conduit of said second pin isolation valve movably disposed to be in fluidic communication with said second opening of said third flow through conduit,

said third pin isolation valve having an internal conduit,

said third pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said third pin isolation valve is movably disposed to be in fluidic communication with said first opening of said fourth flow through conduit,

said internal conduit of said third pin isolation valve movably disposed to be in fluidic communication with said first opening of said first flow through conduit,

said fourth pin isolation valve having an internal conduit,

said fourth pin isolation valve disposed within an opening within said stationary member interfacing with said chamber so that said internal conduit of said fourth pin isolation valve is movably disposed to be in fluidic communication with said second opening of said fourth flow through conduit, said internal conduit of said fourth pin isolation valve movably disposed to be in fluidic communication with said first opening of said second flow through conduit.

115. The multiple valve according to claim 113, wherein at least one of said flow through isolation valve and said flow through injection valve further comprises a housing enclosing said stationary member and said movable member.
116. The multiple valve according to claim 114, wherein at least one of said flow through isolation valve and said flow through injection valve further comprises a housing enclosing said stationary member and said movable member and at least one of said pin isolation valves, said internal conduit of said at least one pin isolation valve fluidically coupled to a conduit penetrating said housing.
117. The multiple valve according to claim 113, further comprising driving means for driving at least one of said movable members.
118. The multiple valve according to claim 117, wherein said driving means is a linear electric motor.
119. The multiple valve according to claim 113, wherein either of said first and second pin isolation valves of said flow through injection valve is fluidically coupled to a sample loop of a high pressure liquid chromatography (HPLC) system.

120. The multiple valve according to claim 113, wherein either of said third and fourth pin isolation valves of said flow through isolation valve is fluidically coupled to a pump supplying high pressure liquid to a high pressure liquid chromatography (HPLC) system.
121. The multiple valve according to claim 113, wherein either of said third and fourth pin isolation valves of said flow through isolation valve is fluidically coupled to a column discharging high pressure liquid from a high pressure liquid chromatography (HPLC) system.
122. The multiple valve according to claim 115, wherein said housing of said at least one of said flow through isolation valve and said flow through injection valve is capable of retaining pressure greater than atmospheric pressure.
123. The multiple valve according to claim 116, wherein said housing of said at least one of said flow through isolation valve and said flow through injection valve is capable of retaining pressure greater than atmospheric pressure.
124. The multiple valve according to claim 113, wherein at least one of said movable members is comprised of PEEK (polyetheretherketone) blend.
125. The multiple valve according to claim 113, wherein said interfacing surface between said stationary member and said movable member of at least one of said linear injection valve and said linear isolation valve is sealed by at least one lip seal.
126. The multiple valve according to claim 114, wherein at least one of said openings of said pin isolation valves of said linear valves is sealed by a lip seal.

127. The multiple valve according to claim 125 wherein said lip seal is self-energizing.
128. The multiple valve according to claim 126, wherein said lip seal is self-energizing.
129. The multiple valve according to claim 113, wherein said movable member consists of at least one of (a) metal, (b) polymer, and (c) sapphire.
130. A method of operating a flow through injection valve, the valve comprising:  
a movable member, the movable member having  
first and second conduits for interfacing with internal conduits of first and second pin isolation valves,  
said first and second conduits opening to a surface of said movable member;  
a third conduit enabling fluidic communication between said internal conduits of said first and second pin isolation valves;  
a fourth conduit enabling fluidic communication between internal conduits of third and fourth pin isolation valves, said third pin isolation valve providing fluid flow, said fourth pin isolation valve exhausting said fluid flow;  
(A) wherein the valve is in an initial position of flow isolation such that said third pin isolation valve providing fluid flow is in fluidic communication with said fourth pin isolation valve exhausting said fluid flow,  
said first pin isolation valve is in fluidic communication with said first conduit, and  
said second pin isolation valve is in fluidic communication with said second conduit;

the method comprising the steps of:

(I) wherein said first pin isolation valve interfaces with said first conduit,

(1) moving said first pin isolation valve away from said first conduit;

(2) moving said movable member,

(3) moving said first pin isolation valve towards said movable member

such that said internal conduit within said first pin isolation valve interfaces with said third conduit; and

(II) wherein said second pin isolation valve interfaces with said second conduit,

(1) moving said second pin isolation valve away from said second conduit;

(2) moving said movable member,

(7) moving said second pin isolation valve towards said movable member

such that said internal conduit with said second pin isolation valve interfaces with said third conduit, thereby establishing fluidic communication between said first and second pin isolation valves; and

(III) wherein said third pin isolation valve interfaces with said fourth conduit,

(1) moving said third pin isolation valve away from said fourth conduit;

(2) moving said movable member;

(3) moving said third pin isolation valve towards said first conduit to

establish fluidic communication with said internal conduit of said third pin isolation valve; and

(IV) wherein said fourth pin isolation valve interfaces with said fourth conduit,

(1) moving said fourth pin isolation valve away from said fourth conduit;

(2) moving said movable member;

(3) moving said fourth pin isolation valve towards said second conduit to

establish fluidic communication with said internal conduit of said fourth pin isolation valve; and

(B) wherein the valve is in an initial position of flow throughput

such that at least one of (a) said third pin isolation valve providing fluid



flow interfaces with said first conduit and (b) said fourth pin isolation valve exhausting said fluid flow interfaces with said second conduit, the method comprising the steps of:

(III) wherein said third pin isolation valve interfaces with said first conduit,

(1) moving said third pin isolation valve away from said first conduit,  
(2) moving said movable member, and  
(3) moving said third pin isolation valve towards said movable member such that said internal conduit within said third pin isolation valve interfaces with said fourth conduit; and

(IV) wherein said fourth pin isolation valve interfaces with said second conduit,

(1) moving said fourth pin isolation valve away from said second conduit,  
(2) moving said movable member, and  
(3) moving said fourth pin isolation valve towards said movable member such that said internal conduit within said second pin isolation valve interfaces with said first conduit; and

(V) wherein said first pin isolation valve interfaces with said third conduit,  
(1) moving said first pin isolation valve away from said third conduit,  
(2) moving said movable member, and  
(3) moving said first pin isolation valve towards said movable member such that said internal conduit within said first pin isolation valve interfaces with said first conduit; and

(VI) wherein said second pin isolation valve interfaces with said third conduit,

(1) moving said second pin isolation valve away from said third conduit,  
(2) moving said movable member, and

(3) moving said second pin isolation valve towards said movable member such that said internal conduit within said second pin isolation valve interfaces with said second conduit.

131. A method of operating a multiple valve, the multiple valve comprising a flow through isolation valve, the flow through isolation valve comprising:
- a movable member, the movable member having
    - first and second conduits for interfacing with internal conduits of first and second pin isolation valves,
    - said conduits opening to a surface of said movable member;
    - first and second blank openings for interfacing with said internal conduits of said first and second pin isolation valves,
  - (A) wherein the valve is in an initial position of flow isolation such that at least one of (a) said first pin isolation valve providing fluid flow interfaces with said first blank opening and (b) said second pin isolation valve exhausting said fluid flow interfaces with said second blank opening,
- the method comprising the steps of:
- (I) wherein said first pin isolation valve interfaces with said first blank opening,
    - (1) moving said first pin isolation valve away from said first blank opening,
    - (2) moving said movable member, and
    - (3) moving said first pin isolation valve towards said movable member such that said internal conduit within said first pin isolation valve interfaces with said first conduit opening to a surface of said movable member; and
  - (II) wherein said second pin isolation valve interfaces with said second blank opening,

(1) moving said second pin isolation valve away from said second blank opening,

(2) moving said movable member, and

(3) moving said second pin isolation valve towards said movable member such that said internal conduit within said second pin isolation valve interfaces with said second conduit opening to a surface of said movable member, and

(B) wherein the valve is in an initial position of flow throughput such that at least one of (a) said first pin isolation valve providing fluid flow interfaces with said first conduit and (b) said second pin isolation valve exhausting said fluid flow interfaces with said second conduit, the method comprising the steps of:

(III) wherein said first pin isolation valve interfaces with said first conduit,

(1) moving said first pin isolation valve away from said first conduit,

(2) moving said movable member, and

(3) moving said first pin isolation valve towards said movable member such that said internal conduit within said first pin isolation valve interfaces with said first blank opening; and

(IV) wherein said second pin isolation valve interfaces with said second conduit,

(1) moving said second pin isolation valve away from said second conduit,

(2) moving said movable member, and

(3) moving said second pin isolation valve towards said movable member such that said internal conduit within said second pin isolation valve interfaces with said second blank opening; and

the multiple valve comprising a flow through injection valve, the flow through injection valve comprising:  
a movable member, the movable member having

first and second conduits for interfacing with internal conduits of first and second pin isolation valves,

said first and second conduits opening to a surface of said movable member;

a third conduit enabling fluidic communication between said internal conduits of said first and second pin isolation valves;

a fourth conduit enabling fluidic communication between internal conduits of third and fourth pin isolation valves, said third pin isolation valve providing fluid flow, said fourth pin isolation valve exhausting said fluid flow;

(A) wherein the valve is in an initial position of flow isolation such that said third pin isolation valve providing fluid flow is in fluidic communication with said fourth pin isolation valve exhausting said fluid flow,

said first pin isolation valve is in fluidic communication with said first conduit; and

said second pin isolation valve is in fluidic communication with said second conduit;

the method comprising the steps of:

(I) wherein said first pin isolation valve interfaces with said first conduit,

(1) moving said first pin isolation valve away from said first conduit;

(2) moving said movable member,

(3) moving said first pin isolation valve towards said movable member

such that said internal conduit within said first pin isolation valve interfaces with said third conduit; and

(II) wherein said second pin isolation valve interfaces with said second conduit,

(1) moving said second pin isolation valve away from said second conduit;

(2) moving said movable member,

(7) moving said second pin isolation valve towards said movable member

such that said internal conduit with said second pin isolation valve interfaces with

said third conduit, thereby establishing fluidic communication between said first and second pin isolation valves; and

(III) wherein said third pin isolation valve interfaces with said fourth conduit,

(1) moving said third pin isolation valve away from said fourth conduit;

(2) moving said movable member;

(3) moving said third pin isolation valve towards said first conduit to establish fluidic communication with said internal conduit of said third pin isolation valve; and

(IV) wherein said fourth pin isolation valve interfaces with said fourth conduit,

(1) moving said fourth pin isolation valve away from said fourth conduit;

(2) moving said movable member;

(3) moving said fourth pin isolation valve towards said second conduit to establish fluidic communication with said internal conduit of said fourth pin isolation valve; and

(B) wherein the valve is in an initial position of flow throughput such that at least one of (a) said third pin isolation valve providing fluid flow interfaces with said first conduit and (b) said fourth pin isolation valve exhausting said fluid flow interfaces with said second conduit, the method comprising the steps of:

(III) wherein said third pin isolation valve interfaces with said first conduit,

(1) moving said third pin isolation valve away from said first conduit,

(2) moving said movable member, and

(3) moving said third pin isolation valve towards said movable member such that said internal conduit within said third pin isolation valve interfaces with said fourth conduit; and

(IV) wherein said fourth pin isolation valve interfaces with said second conduit,

(1) moving said fourth pin isolation valve away from said second conduit,

(2) moving said movable member, and

(3) moving said fourth pin isolation valve towards said movable member such that said internal conduit within said second pin isolation valve interfaces with said first conduit; and

(V) wherein said first pin isolation valve interfaces with said third conduit,

(1) moving said first pin isolation valve away from said third conduit,

(2) moving said movable member, and

(3) moving said first pin isolation valve towards said movable member such that said internal conduit within said first pin isolation valve interfaces with said first conduit; and

(VI) wherein said second pin isolation valve interfaces with said third conduit,

(1) moving said second pin isolation valve away from said third conduit,

(2) moving said movable member, and

(3) moving said second pin isolation valve towards said movable member such that said internal conduit within said second pin isolation valve interfaces with said second conduit.

132. The method of operating a flow through injection valve according to claim 130, wherein said first and second conduits opening to a surface of said movable member are in fluidic communication with a sample loop of a high pressure liquid chromatography (HPLC) system.

133. The method of operating a flow through injection valve according to claim 130, wherein said first and second pin isolation valves are in fluidic communication with a needle and a syringe of a high pressure liquid chromatography (HPLC) system.

134. The method of operating a flow through injection valve according to claim 130, wherein said third and fourth pin isolation valves are in fluidic

communication with a pump and a column of a high pressure liquid chromatography (HPLC) system,

135. The method of operating a multiple valve according to claim 131, wherein said first and second conduits opening to a surface of said movable member of said flow through injection valve are in fluidic communication with a sample loop of a high pressure liquid chromatography (HPLC) system,
136. The method of operating a multiple valve according to claim 131, wherein said first and second pin isolation valves of said flow through injection valve are in fluidic communication with a needle and a syringe of a high pressure liquid chromatography (HPLC) system,
137. The method of operating a multiple valve according to claim 131, wherein said third and fourth pin isolation valves of said flow through injection valve are in fluidic communication with a pump and a column of a high pressure liquid chromatography (HPLC) system,

## ABSTRACT

A flow through injection valve having a stationary member, a movable member, a surface of the stationary member interfacing with a surface of the movable member; and at least one pin isolation valve having a flow through internal conduit and movably positioned so that the internal conduit can interface with at least one flow through conduit in the movable member. The pin isolation valves are movably positioned so that the internal conduit is also capable of fluidically communicating with another flow through internal conduit in the movable member. The flow through injection valve can be combined with a similar flow through isolation valve to serve as a multiple valve and typically for replacing a conventional face seal valve of a high pressure liquid chromatography (HPLC) system. The multiple valve allows flow to be transferred through without need for switching or rotating under high pressure. Movement is by rotation or translation.



This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):


- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**





BEST AVAILABLE COPY

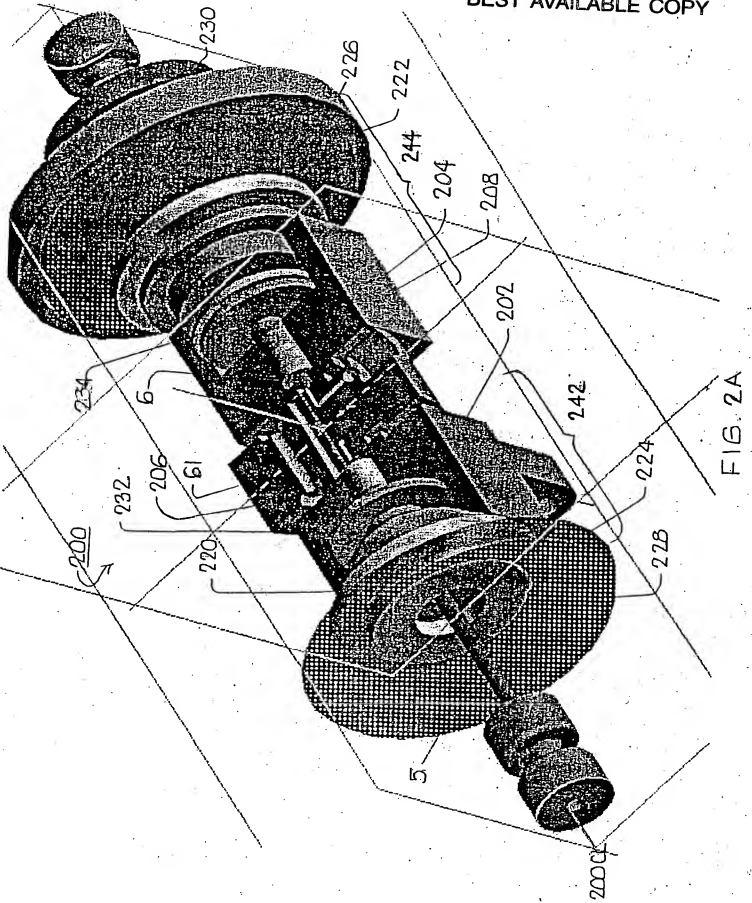

708  $\overrightarrow{Pm}$



BEST AVAILABLE COPY

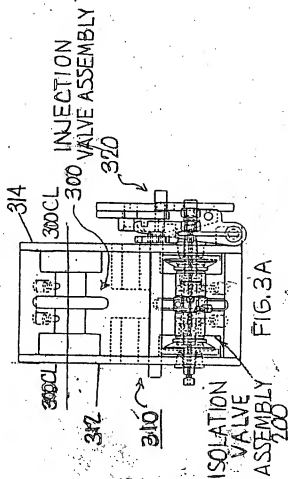

BEST AVAILABLE COPY

FIG. 3C

